


FOR THE DOOR INSTALLATION
PLEASE CONSULT THE
INSTALLATION MANUAL

PROTECTION OF THE
COMPARTMENT: NORM
UNI-EN-ISO-13857:2008
FOR PROTECTION WITH
METALLIC GRID, USE
A COMPACT MESH 12x12mm


VANO TECNICO
AL PIANO "0"

PREPARE CORRUGATED
TUBE Ø10cm TO THE
TECHNICAL AREA

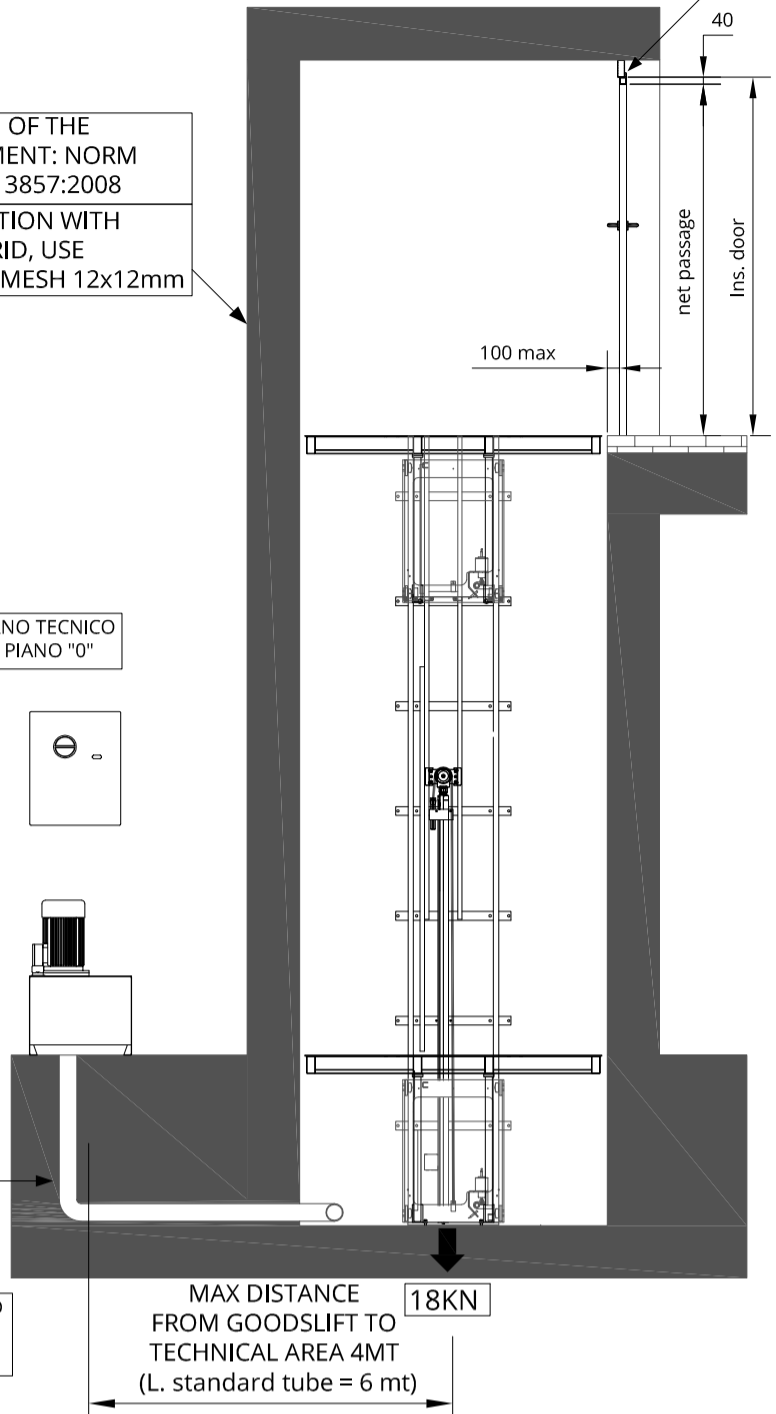

MAX DISTANCE
FROM GOODS LIFT TO
TECHNICAL AREA 4MT
(L. standard tube = 6 mt)

WALL IN CONCRETE CLASS 20/25
Standard fixing: Anchor mod. Fischer FBN II (12x146)

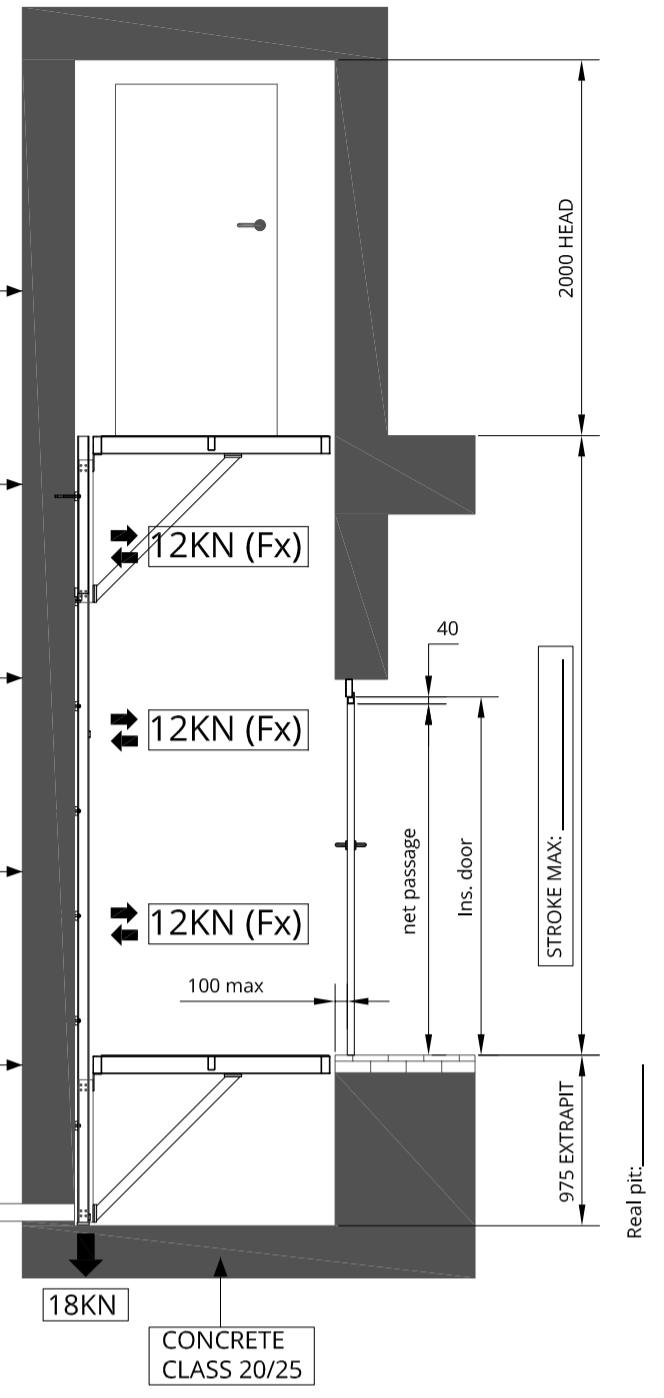


CONCRETE
CLASS 20/25

TECHNICAL
AREA

PREPARE CORRUGATED TUBE
Ø10cm TO THE TECHNICAL AREA


PREPARE TUBULAR 100x30 FLUSH
WITH THE GOODS LIFT ROOM
Only for standard door application

NOTA: EVENTUALE
RIDUZIONE DELLO SPAZIO
TRA PIANALE E SOGLIA E' A
CARICO DEL COMMITTENTE

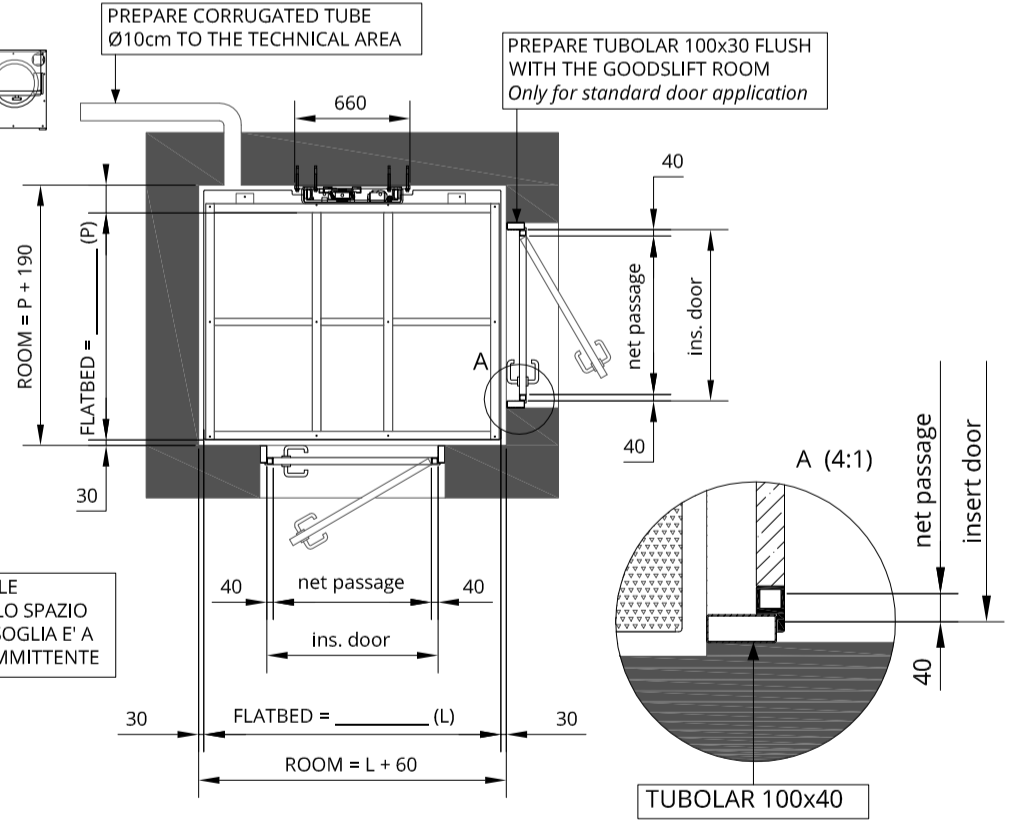

TUBULAR 100x40

MARK THE ENTRANCES AND THE HEIGHT OF FLOOR

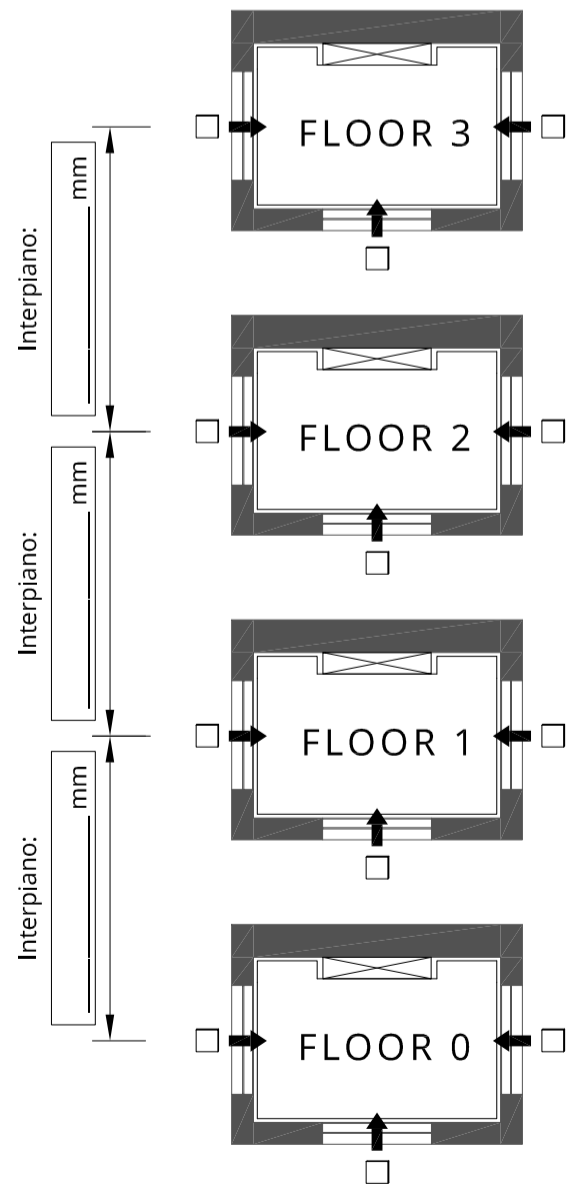

MODEL: UP3 - 300Kg UP6 - 600Kg

Date: _____

Signature for approval: _____




MISURE IN mm

STROKE AND FLATBED DIMENSION			
MODEL	WIDTH (mm)	DEPTH (mm)	STROKE MAX (mm)
UP 3	1700	1300	7000
UP 6	1700	1300	7000

Motore	Tensione funzionamento	Avviamento	Interruttore consigliato*	Corrente nominale	Corrente avviamento
1,5kW	220 V - monofase	Diretto	2x16A id=0,3A	9,5	28
2,2kW	220 V - monofase	Diretto	2x16A id=0,3A	10,5	32

Force on the wall, Fx function of depth flatbed

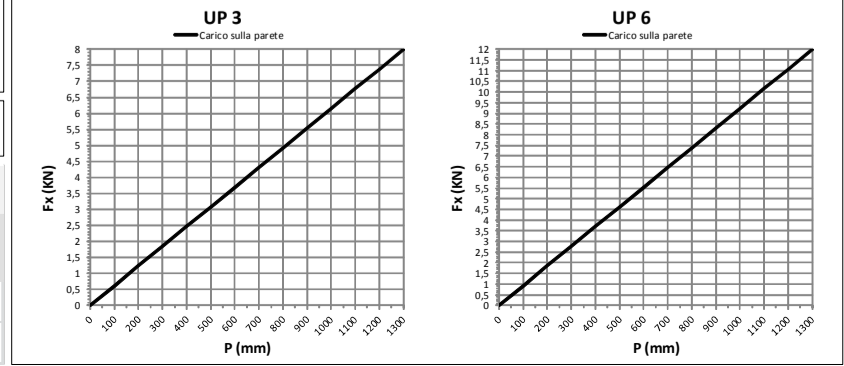

directlifts 1300 240 298 | info@directlifts.com.au | www.directlifts.com.au

Q.TA DESCRIZIONE: MODEL: UP3R - 300Kg UP6R - 600Kg STROKE MAX: 7000mm ONLY FOR GOODS

Cliente: _____ Data: _____ Disegno n°: TAV-UP36R-STD01

Sostituisce dat.: _____ Sostituisce il: _____