


FOR THE DOOR INSTALLATION
PLEASE CONSULT THE
INSTALLATION MANUAL

PROTECTION OF THE
COMPARTMENT: NORM
UNI-EN-ISO-13857:2008
FOR PROTECTION WITH
METALLIC GRID, USE
A COMPACT MESH 12x12mm

TECHNICAL AREA
AT FLOOR "0"

PREPARE CORRUGATED
TUBE Ø10cm TO THE
TECHNICAL AREA

MAX DISTANCE
FROM GOODSPLIT TO
TECHNICAL AREA 4MT
(L. standard tube = 6 mt)

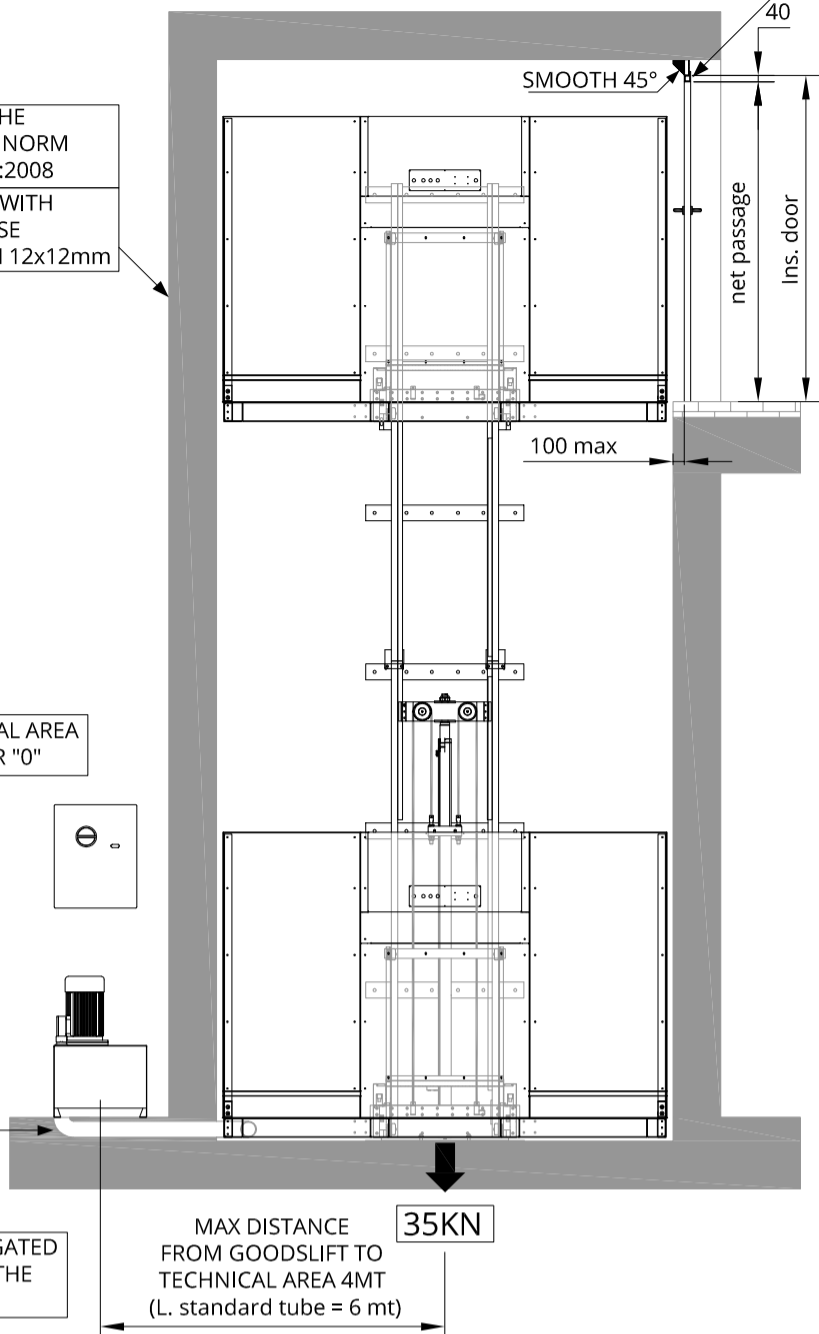

WALL IN CONCRETE CLASS 20/25
Standard fixing: Anchor mod. Fischer FBN II 16/50 (16x170)

23KN (Fx)

23KN (Fx)


23KN (Fx)

23KN (Fx)

35KN

CONCRETE
CLASS 20/25


150 EXTRAPIT
REAL PIT:

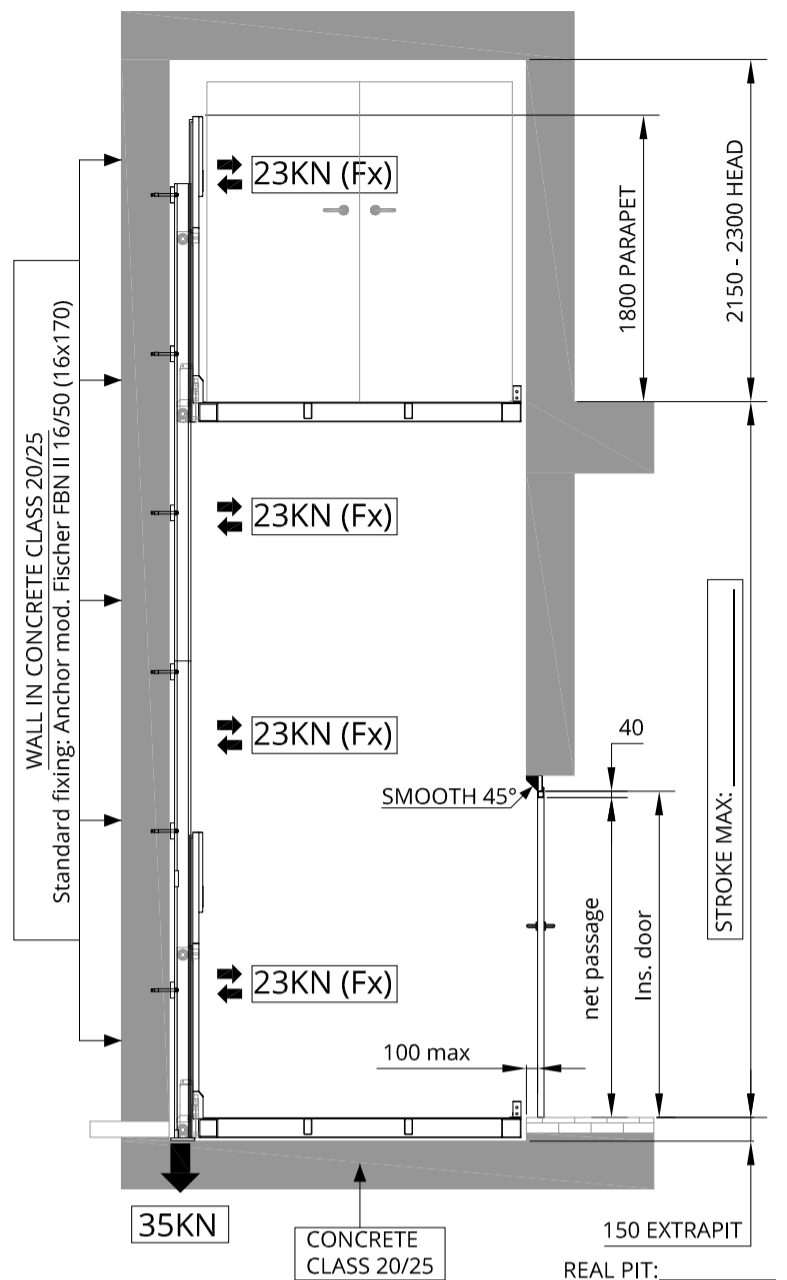

PREPARE CORRUGATED TUBE
Ø10cm TO THE TECHNICAL AREA


PREPARE TUBULAR 100x30 FLUSH
WITH THE GOODSPLIT ROOM
Only for standard door application

TECHNICAL AREA

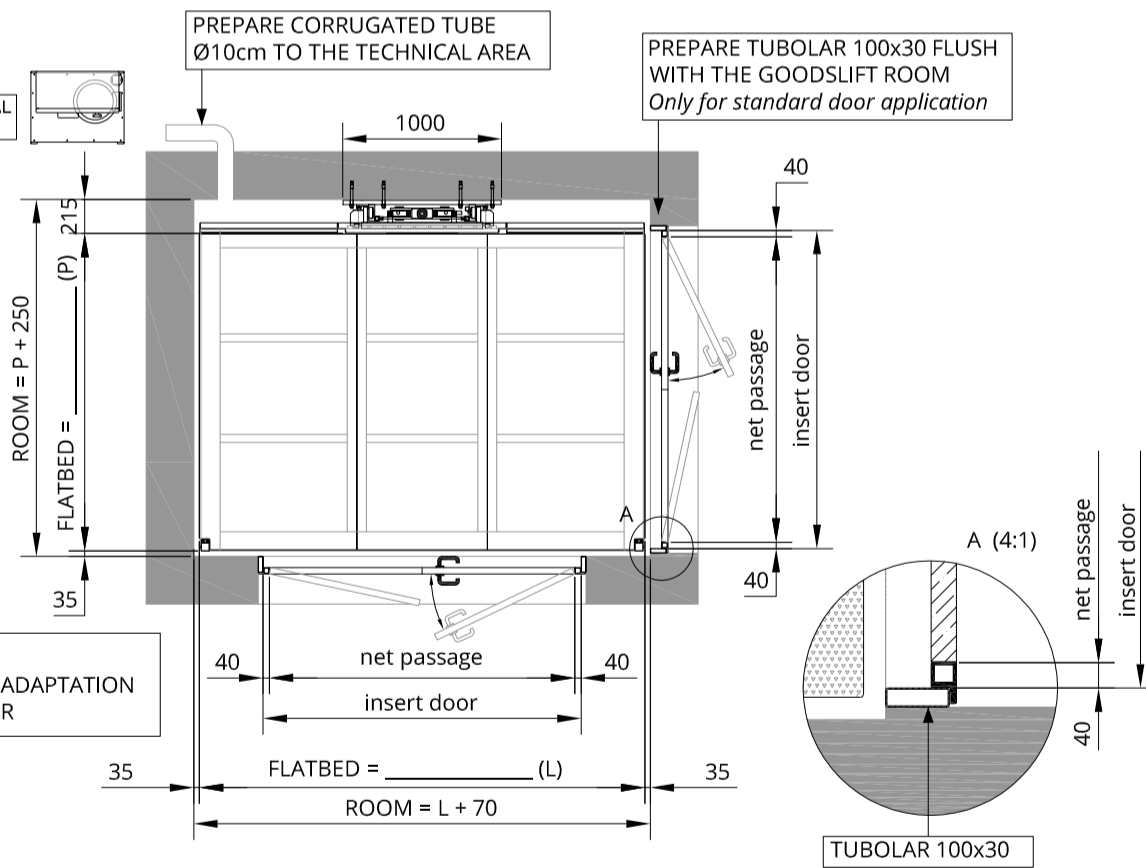

NOTE:
THRESHOLD ADAPTATION
BY CUSTOMER

MARK THE ENTRANCES AND THE HEIGHT OF FLOOR

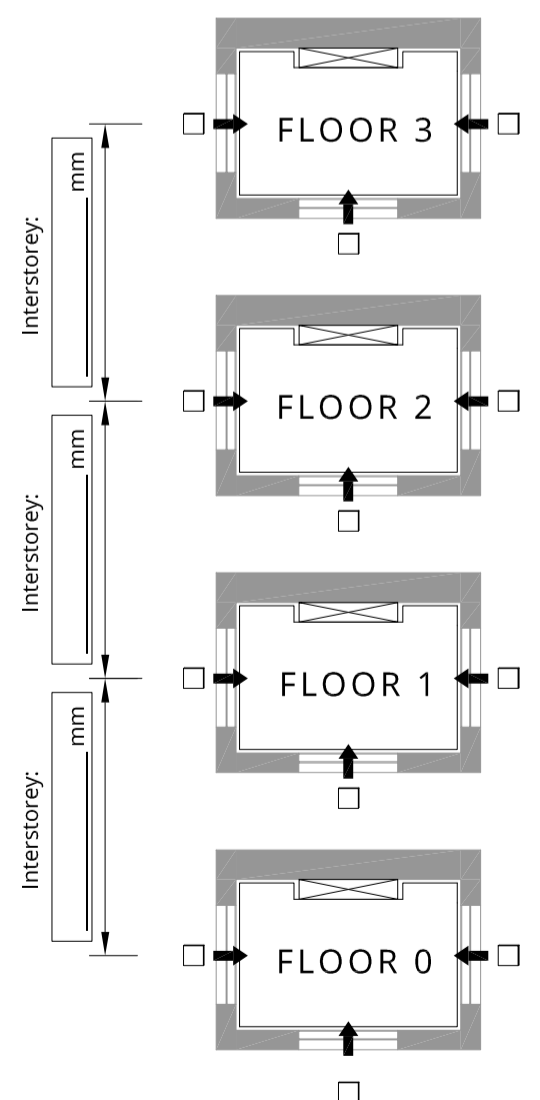

Motore	Tensione funzionamento	Avviamento	Interruttore consigliato*	Corrente nominale	Corrente avviamento
3kW	220 V - trifase	Diretto	3x16A id=0,3A	10	35
	380 V - trifase	Diretto	4x16A id=0,3A	5	22
4kW	220 V - trifase	Diretto	3x20A id=0,3A	16	50
	380 V - trifase	Diretto	4x16A id=0,3A	8	25
5,5kW	220 V - trifase	Diretto	4x25A id=0,3A	22	60
	380 V - trifase	Diretto	4x16A id=0,3A	11	35

MODEL: UP10 - 1000Kg UP15 - 1500Kg



Date: _____ Signature for approval: _____



MISURE IN mm

FLATBED DIMENSION (grey area)

Force on the wall, Fx function of depth flatbed

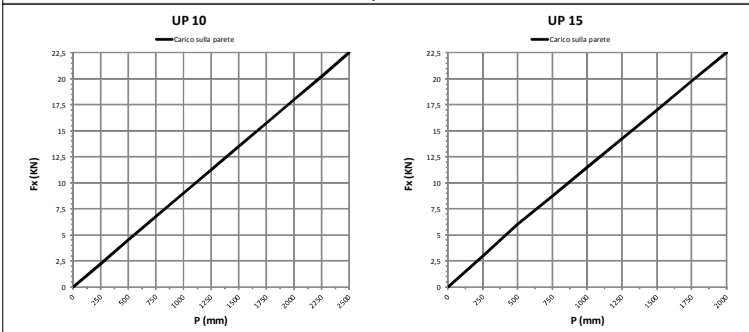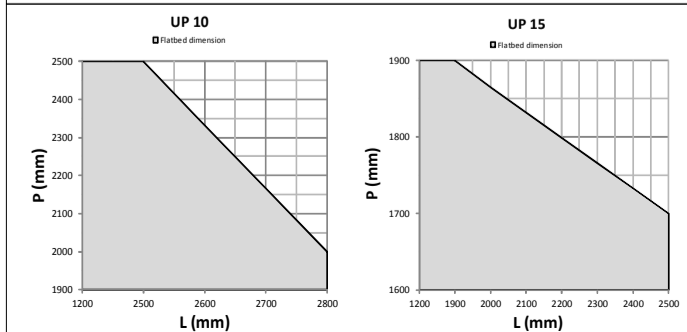

directlifts 1300 240 298 | info@directlifts.com.au | www.directlifts.com.au

Q.TA	DESCRIZIONE:	Cliente:
	MODEL: UP10 - 1000Kg UP15 - 1500Kg	Uso: _____ Data: 07/11/14
	STROKE MAX: 12000mm WITH OPERATOR ON BOARD	Diseño n°: _____
		TAV-UP1015-SPB01
		Sostituito da: _____
		Sostituisce il: _____