


FOR THE DOOR INSTALLATION  
PLEASE CONSULT THE  
INSTALLATION MANUAL

PROTECTION OF THE  
COMPARTAMENT: NORM  
UNI-EN-ISO-13857:2008  
FOR PROTECTION WITH  
METALLIC GRID, USE  
A COMPACT MESH 12x12mm

TECHNICAL AREA  
AT FLOOR "0"


PREPARE CORRUGATED  
TUBE Ø10cm TO THE  
TECHNICAL AREA

MAX DISTANCE  
FROM GOODSPLIT TO  
TECHNICAL AREA 4MT  
(L. standard tube = 6 mt)

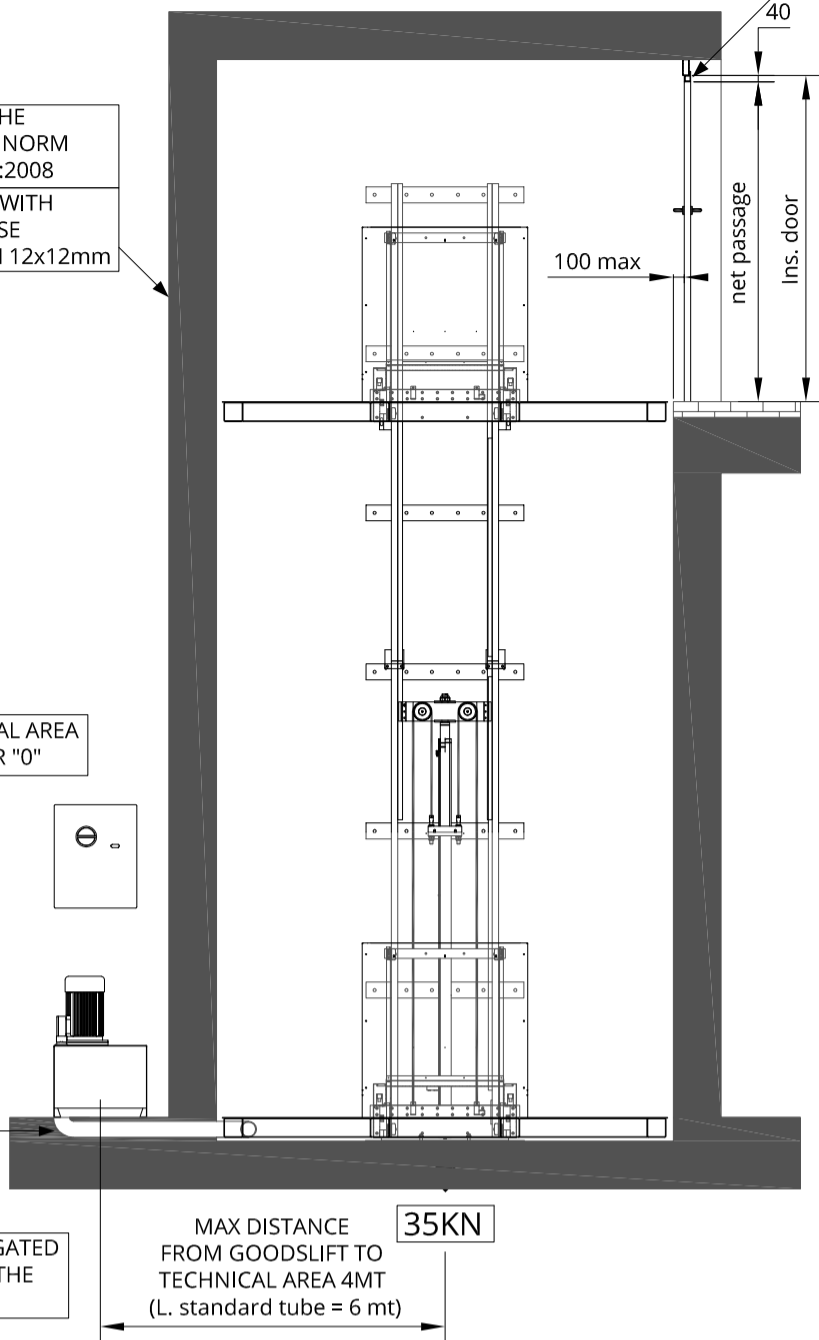


FOR THE DOOR INSTALLATION  
PLEASE CONSULT THE  
INSTALLATION MANUAL

WALL IN CONCRETE CLASS 20/25  
Standard fixing: Anchor mod. Fischer FBN II 16/50 (16x170)

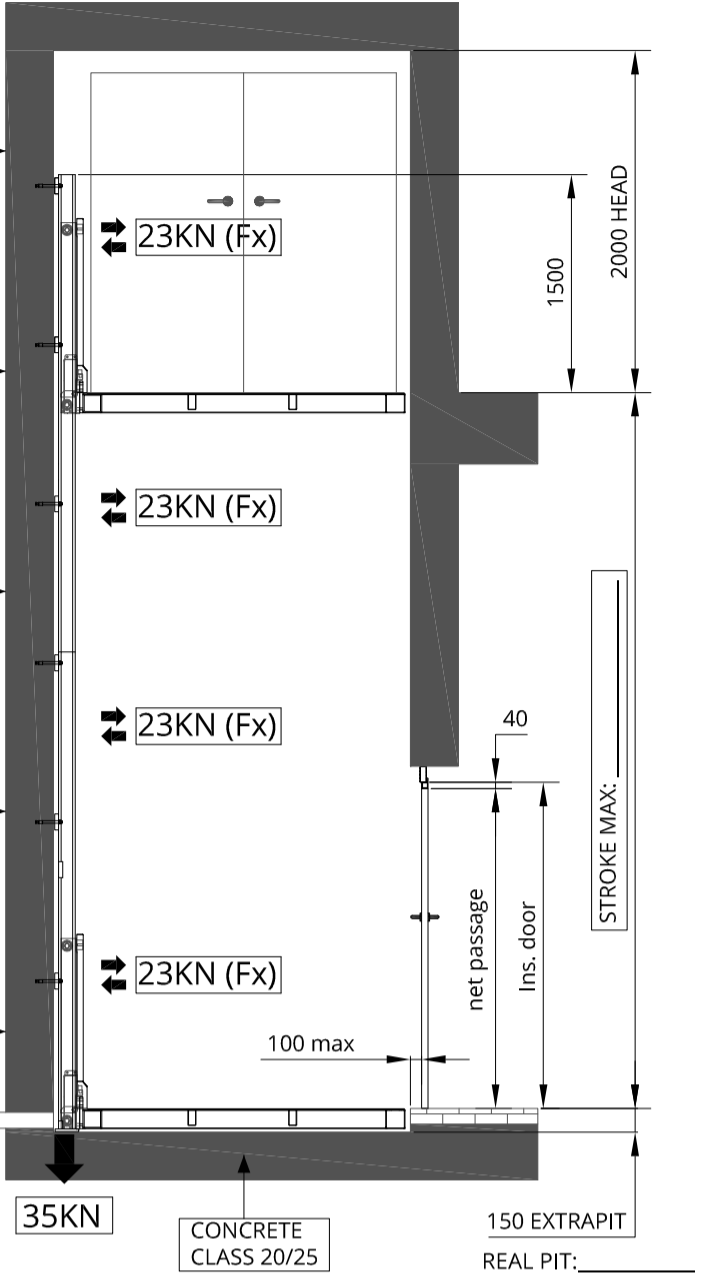


PREPARE CORRUGATED TUBE  
Ø10cm TO THE TECHNICAL AREA

PREPARE TUBULAR 100x40 FLUSH  
WITH THE GOODSPLIT ROOM  
Only for standard door application

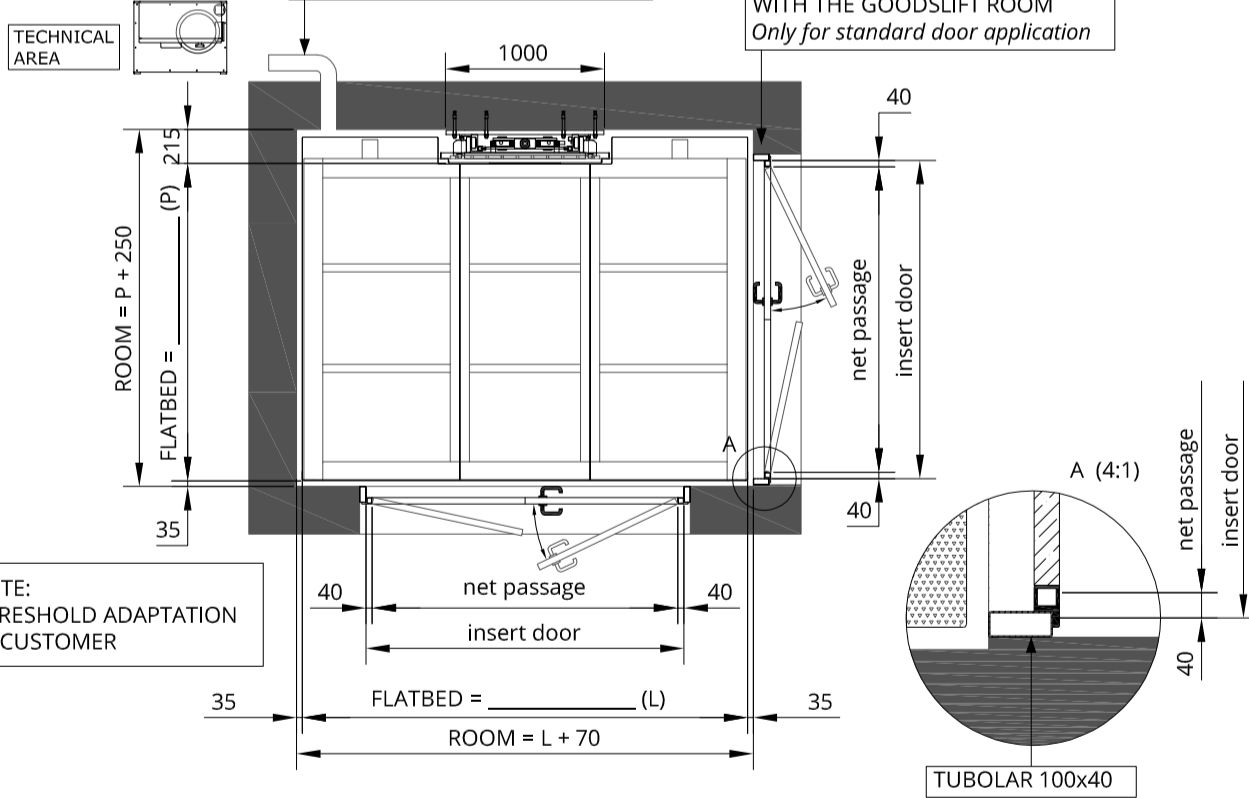

NOTE:  
THRESHOLD ADAPTATION  
BY CUSTOMER

MARK THE ENTRANCES AND THE HEIGHT OF FLOOR

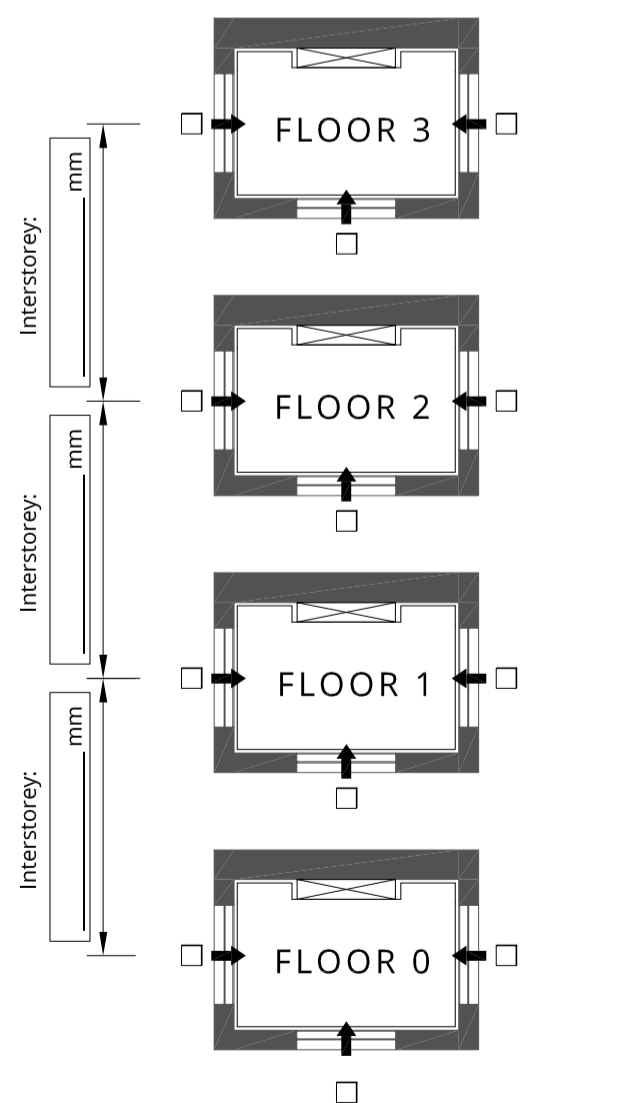


Motore	Tensione funzionamento	Avviamento	Interruttore consigliato*	Corrente nominale	Corrente avviamento
3kW	220 V - trifase	Diretto	3x16A id=0,3A	10	35
	380 V - trifase	Diretto	4x16A id=0,3A	5	22
4kW	220 V - trifase	Diretto	3x20A id=0,3A	16	50
	380 V - trifase	Diretto	4x16A id=0,3A	8	25
5,5kW	220 V - trifase	Diretto	4x25A id=0,3A	22	60
	380 V - trifase	Diretto	4x16A id=0,3A	11	35

**MODEL:**  UP10 - 1000Kg  UP15 - 1500Kg


Date: \_\_\_\_\_ Signature for approval: \_\_\_\_\_



FLATBED DIMENSION (grey area)

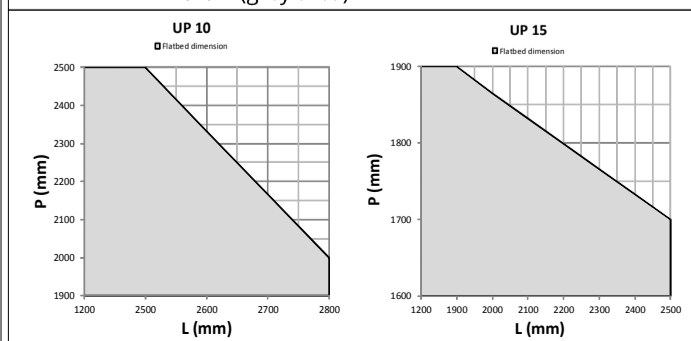

MISURE IN mm

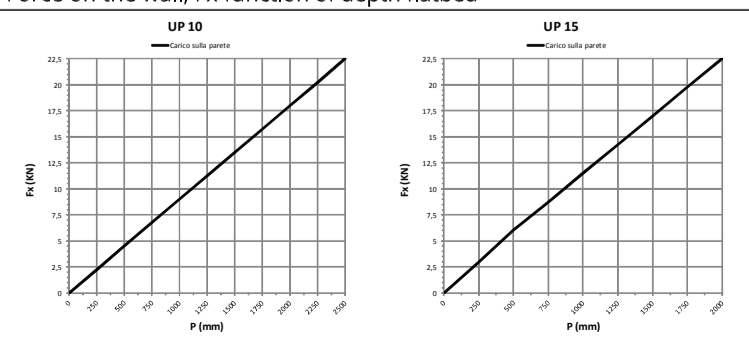

directlifts 1300 240 298 | info@directlifts.com.au | www.directlifts.com.au

Q.TA DESCRIZIONE: MODEL: UP10 - 1000Kg UP15 - 1500Kg STROKE MAX: 12000mm ONLY FOR GOODS

Cliente: \_\_\_\_\_ Data: 07/11/14

Disegno n°: TAV-UP1015-STD01

Sostituito da: \_\_\_\_\_

Sostituisce il: \_\_\_\_\_