
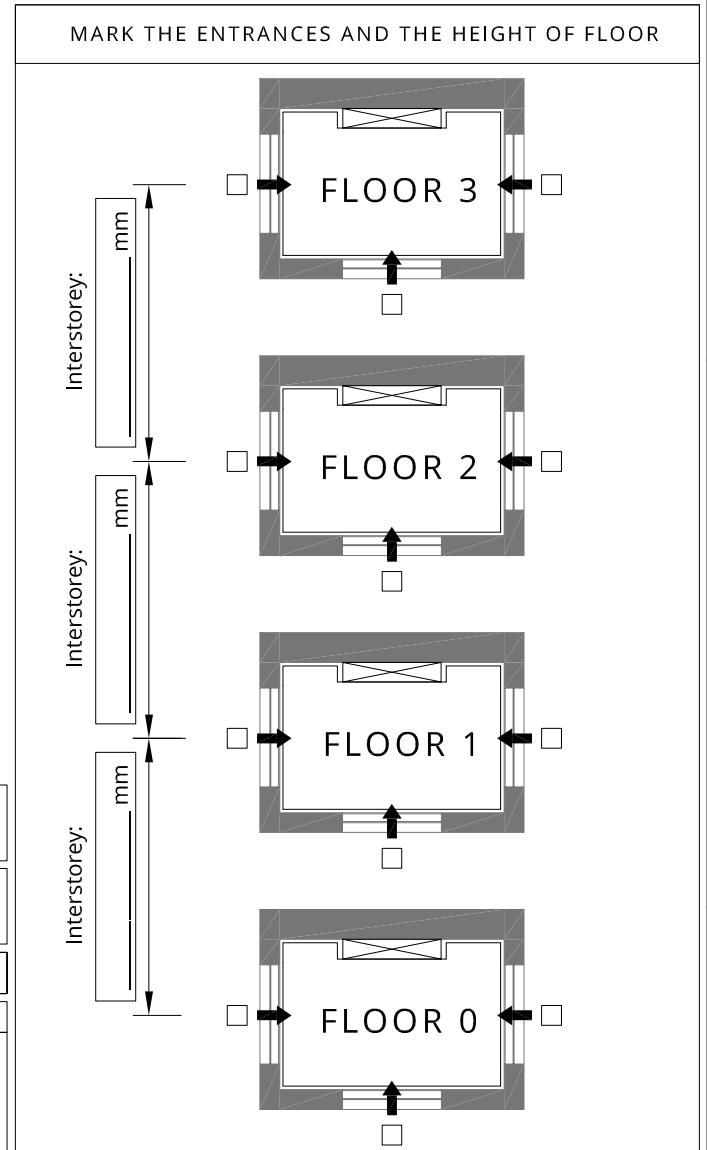
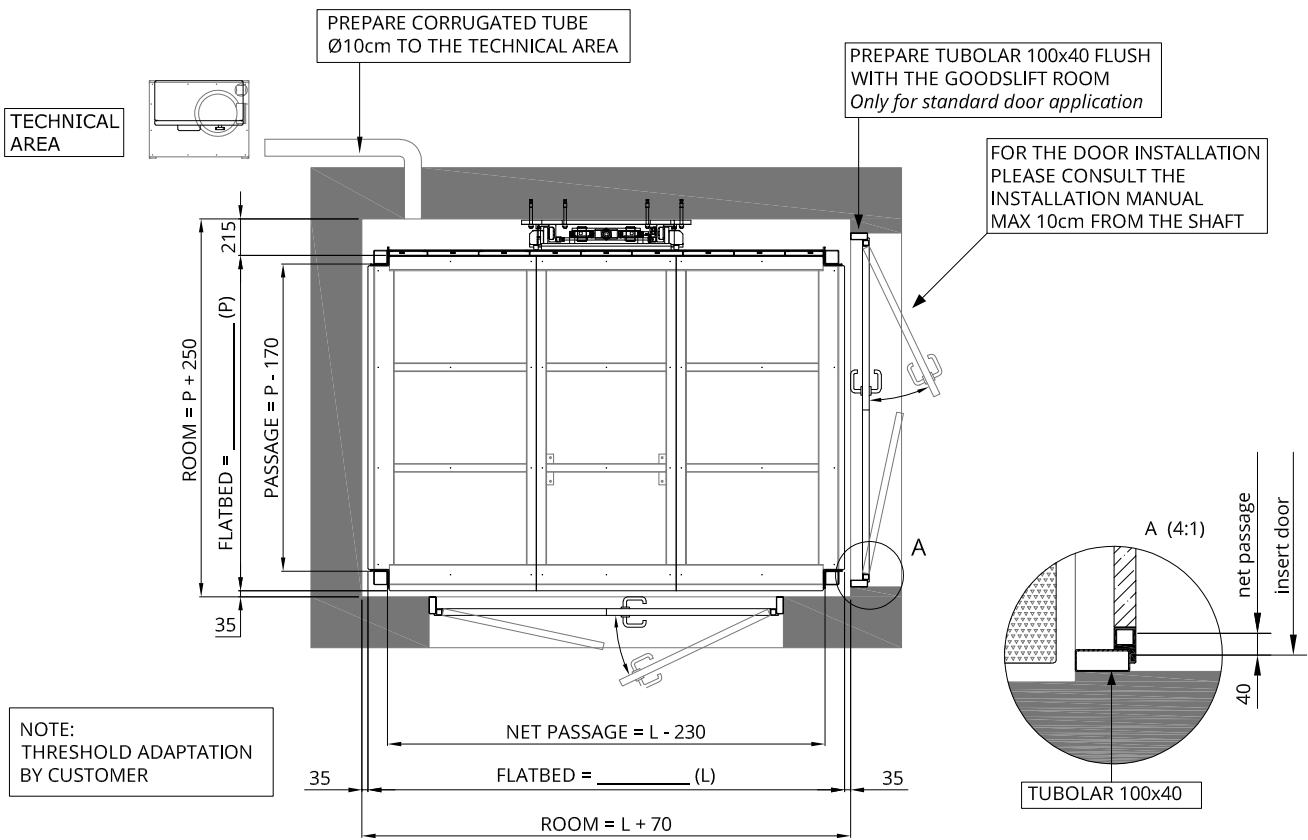
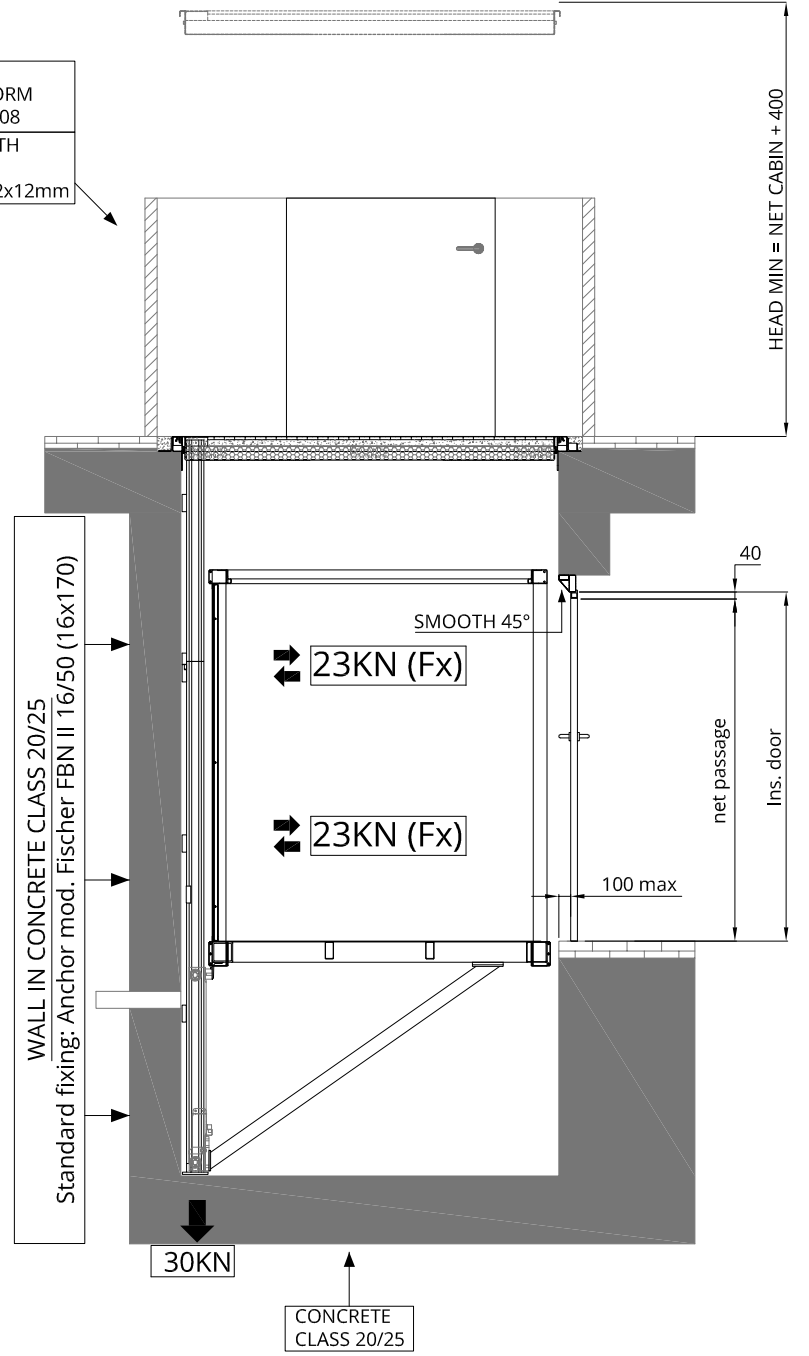


PROTECTION OF THE COMPARTMENT: NORM UNI-EN-ISO-13857:2008
FOR PROTECTION WITH METALLIC GRID, USE A COMPACT MESH 12x12mm

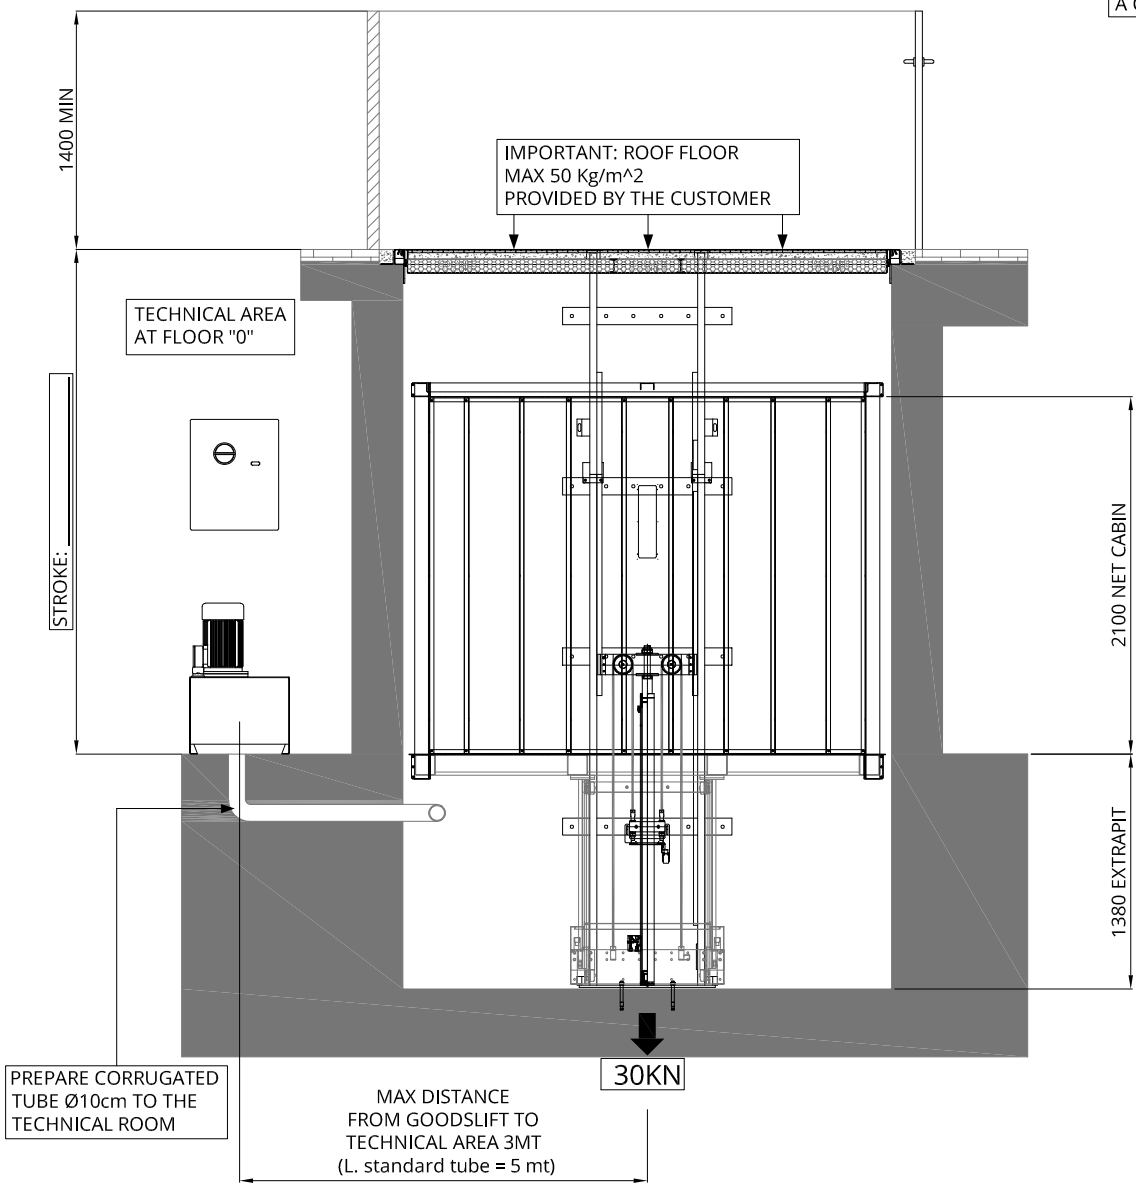


Motor	Tension-functioning	Starter	Suggested switch*	Rated current	Current starter
3kW	220 V - 3ph	Direct	3x16A id=0,3A	10	35
	380 V - 3ph	Direct	4x16A id=0,3A	5	22
4kW	220 V - 3ph	Direct	3x20A id=0,3A	16	50
	380 V - 3ph	Direct	4x16A id=0,3A	8	25
5,5kW	220 V - 3ph	Direct	4x25A id=0,3A	22	60
	380 V - 3ph	Direct	4x16A id=0,3A	11	35

MODEL: UP5RT - 500Kg UP10RT - 1000Kg


Date: _____ Signature for approval: _____

MISURE IN mm

FLATBED DIMENSION (grey area)





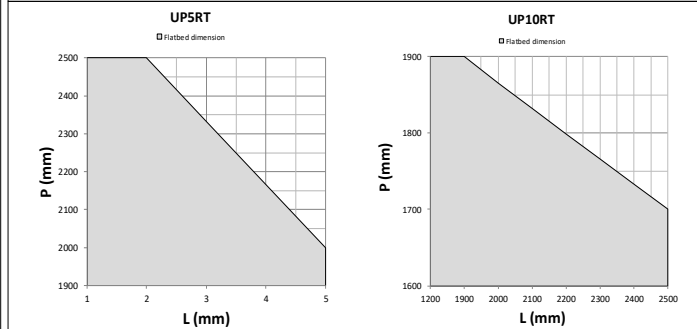


Force on the wall, Fx function of depth flatbed

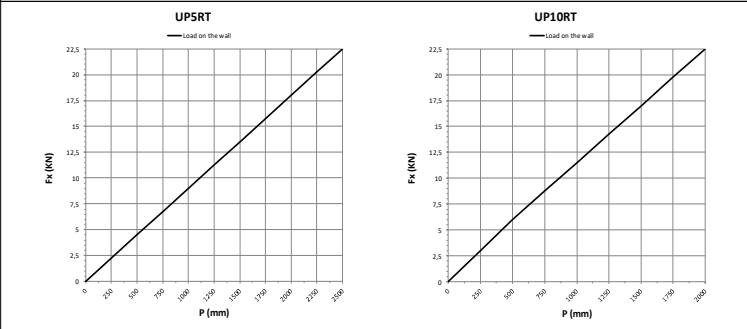


directlifts 1300 240 298 | info@directlifts.com.au | www.directlifts.com.au

Q.TA	DESCRIZIONE:	Cliente:
	MODEL: UP5-10RT SPB	Uspagnonic Data: 09/09/19
	STROKE MAX: 12000mm WITH OPERATOR ON BOARD	Disegno n°: TAV-UP5-10RT-SPB01
		Sostituto dat. Sostitutore it.

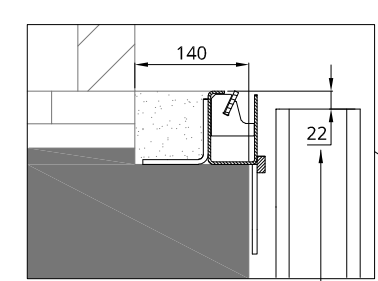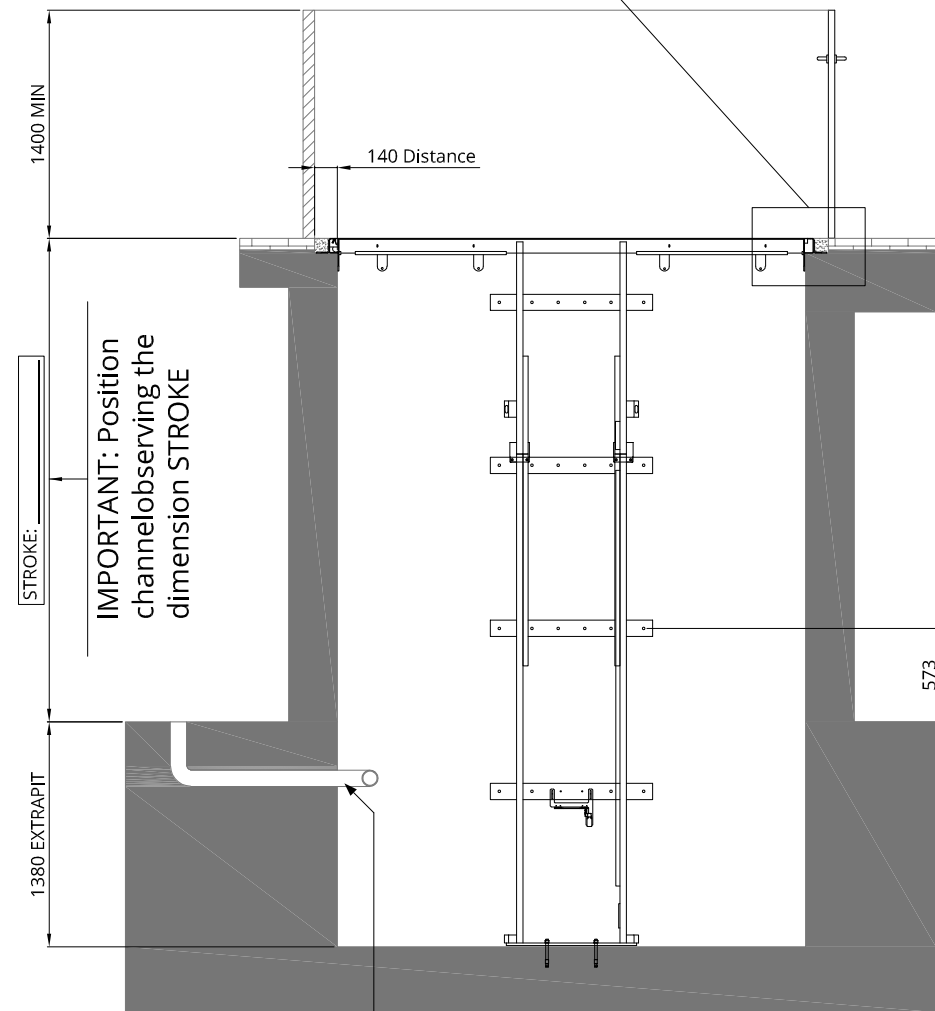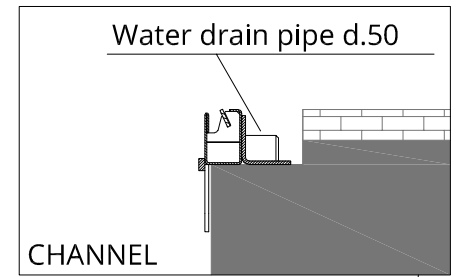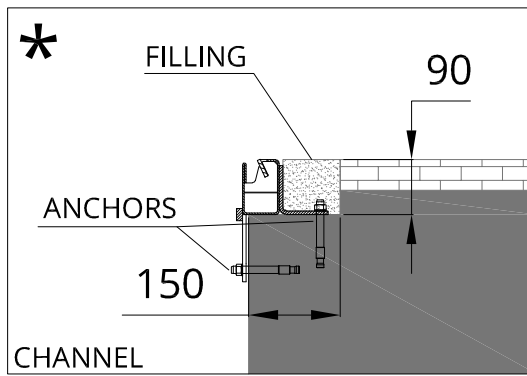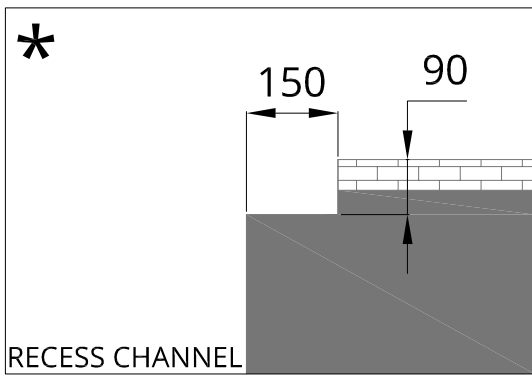


IMPORTANT: Position guides observing the dimension indicated by the channel and check 573 from the downstairs level

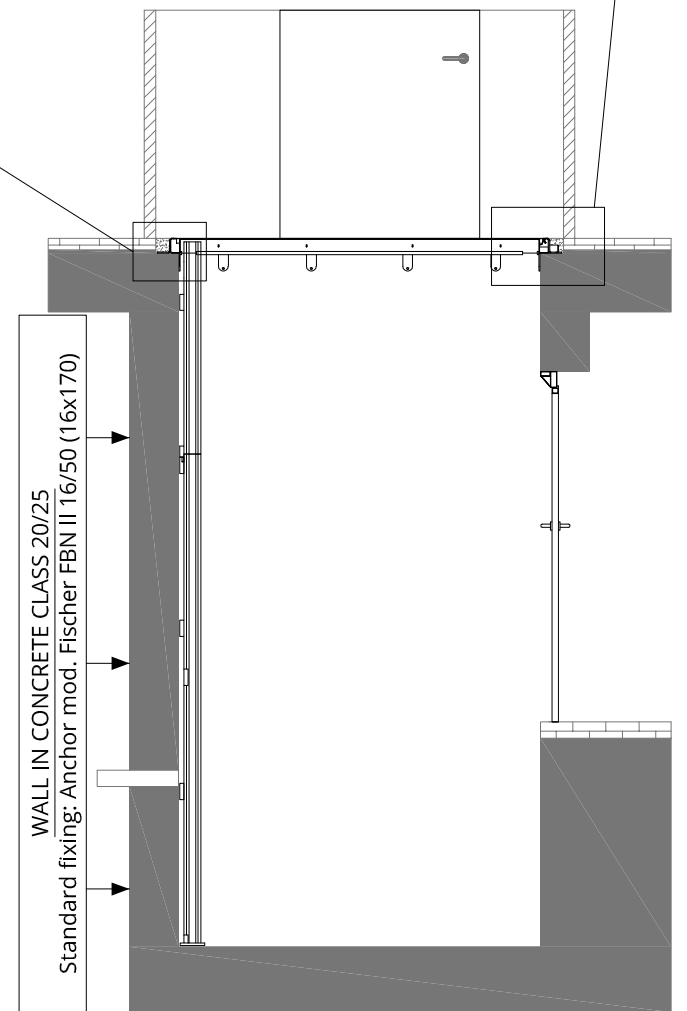


PREPARE CORRUGATED TUBE Ø10cm TO THE TECHNICAL AREA

Water drain pipe d.50

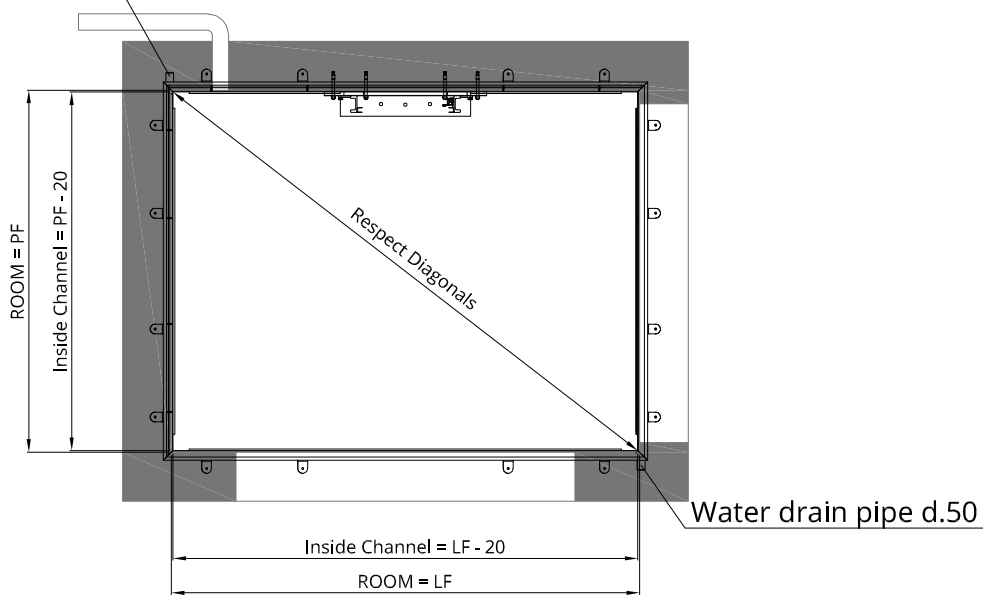

MARK THE ENTRANCES AND THE HEIGHT OF FLOOR

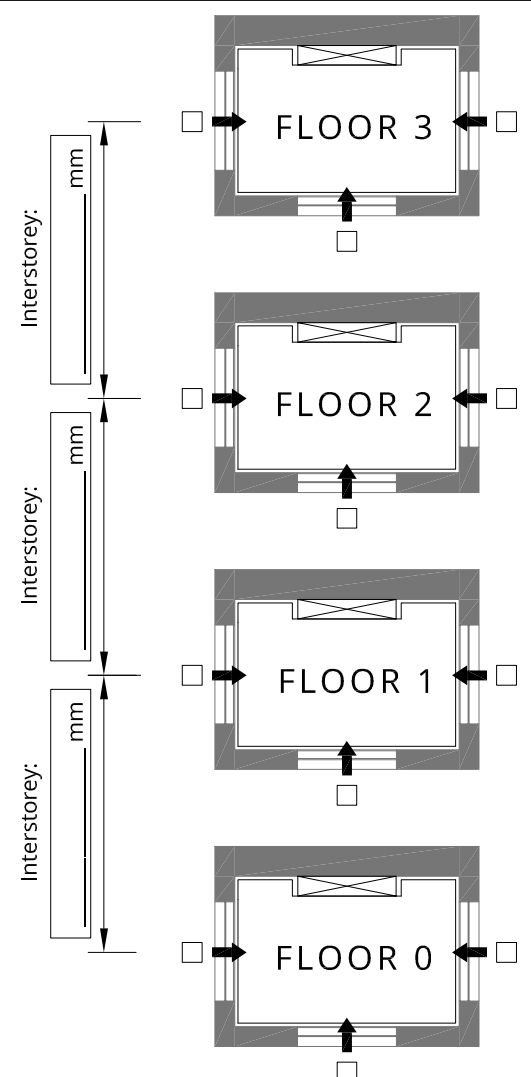

Motor	Tension-functioning	Starter	Suggested switch*	Rated current	Current starter
3kW	220 V - 3ph	Direct	3x16A id=0,3A	10	35
	380 V - 3ph	Direct	4x16A id=0,3A	5	22
4kW	220 V - 3ph	Direct	3x20A id=0,3A	16	50
	380 V - 3ph	Direct	4x16A id=0,3A	8	25
5,5kW	220 V - 3ph	Direct	4x25A id=0,3A	22	60
	380 V - 3ph	Direct	4x16A id=0,3A	11	35


MODEL: UP5RT - 500Kg UP10RT - 1000Kg

Date: _____ Signature for approval: _____




MISURE IN mm

FLATBED DIMENSION (grey area)

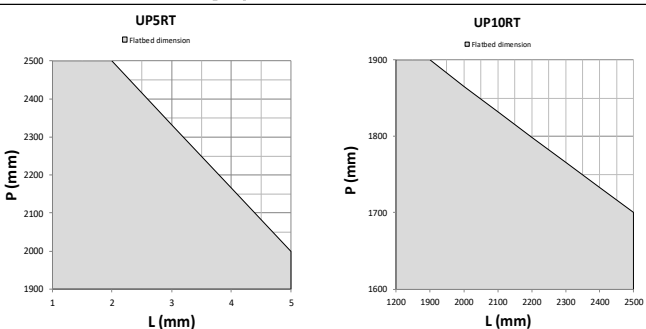

Force on the wall, Fx function of depth flatbed

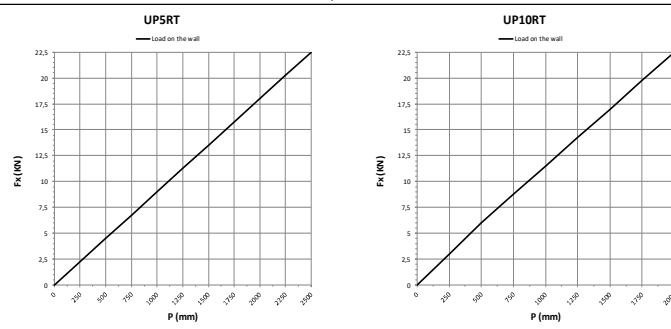

directlifts 1300 240 298 | info@directlifts.com.au | www.directlifts.com.au

Q.TA	DESCRIZIONE:	Cliente:
	MODEL: UP5-10RT SPB	Design n°:
	STROKE MAX: 12000mm	TAV-UP5-10RTSPB-PIT
	PIT DETAILS UP SPB	Sostituto dat.:
		Sostitutore it.: