

PREPARE POWER 3F+T+N SWITCH AUTOMATIC MAGNETOTHERMIC WITH DIFFERENTIAL CURVE "C", Id = 0.3A



Motor	Tension-functioning	Starter	Suggested switch*	Rated current	Current starter
3kW	220 V - 3ph	Direct	3x16A id=0,3A	10	35
	380 V - 3ph	Direct	4x16A id=0,3A	5	22
4kW	220 V - 3ph	Direct	3x20A id=0,3A	16	50
	380 V - 3ph	Direct	4x16A id=0,3A	8	25
5,5kW	220 V - 3ph	Direct	4x25A id=0,3A	22	60
	380 V - 3ph	Direct	4x16A id=0,3A	11	35

MODEL: UP15RT - 1500Kg UP20RT - 2000Kg

Date: _____ Signature for approval: _____



MISURE IN mm

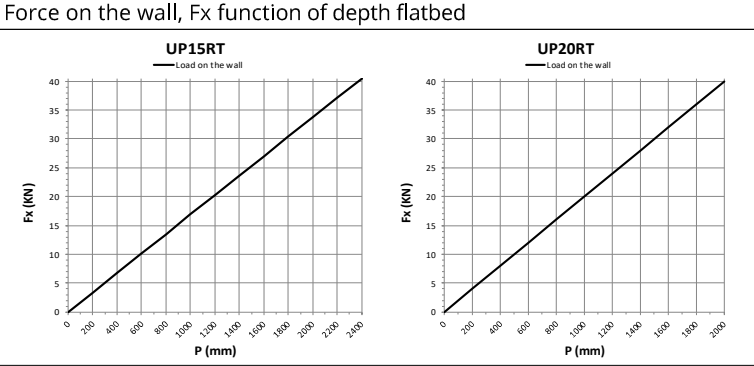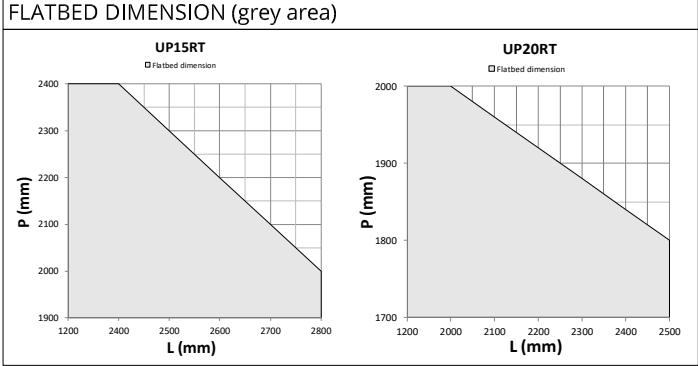

directlifts

Q.TA DESCRIZIONE: MODEL: UP15-20RT SPB

STROKE MAX: 12000mm WITH OPERATOR ON BOARD


Clijente: _____ Data: 10/09/19

Disegno n°: TAV-UP15-20RT-SPB01






Sostituto dat.: _____

Sostitutore it.: _____

Formule Foglio A3 Scale

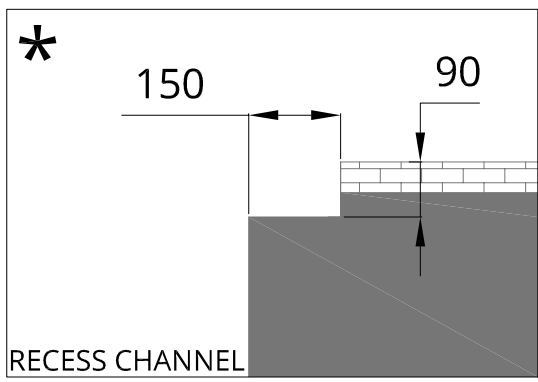


* Predisposition recess channel provided by the customer

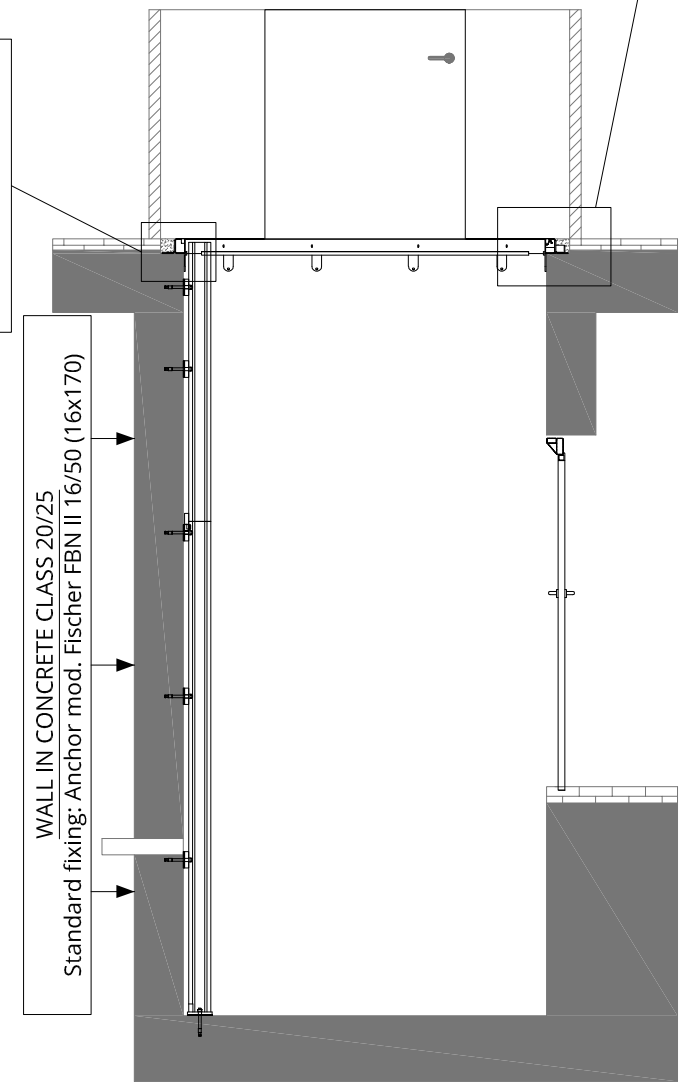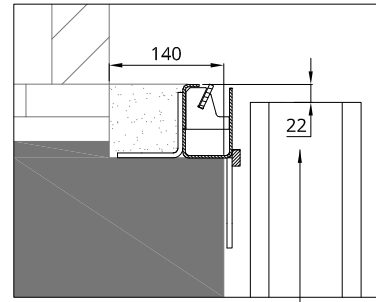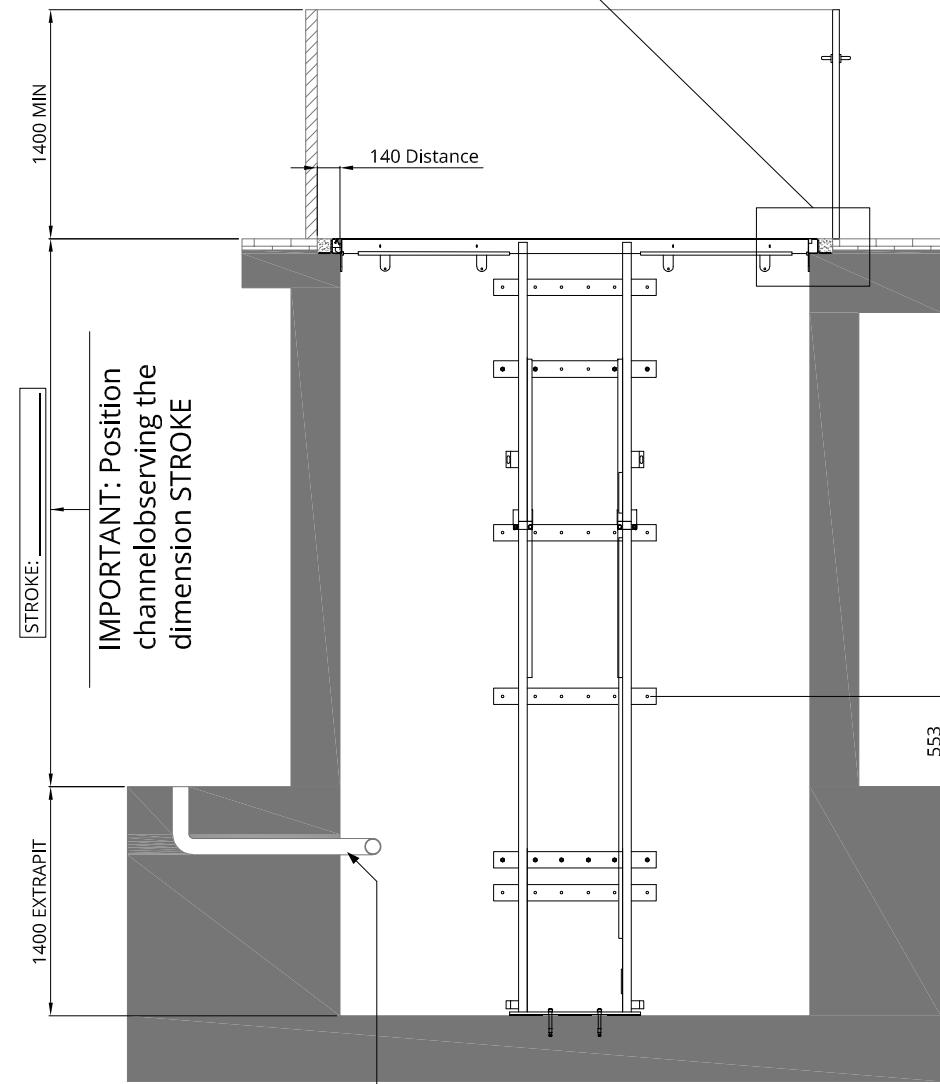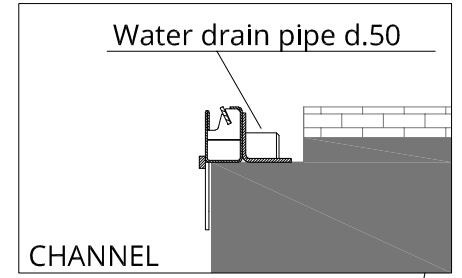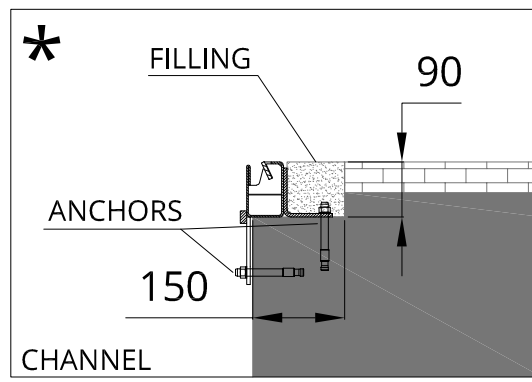


CONCRETE CLASS 20/25

PREDISPORRE TUBO CORRUGATO Ø10cm FINO AL VANO TECNICO

Water drain pipe d.50

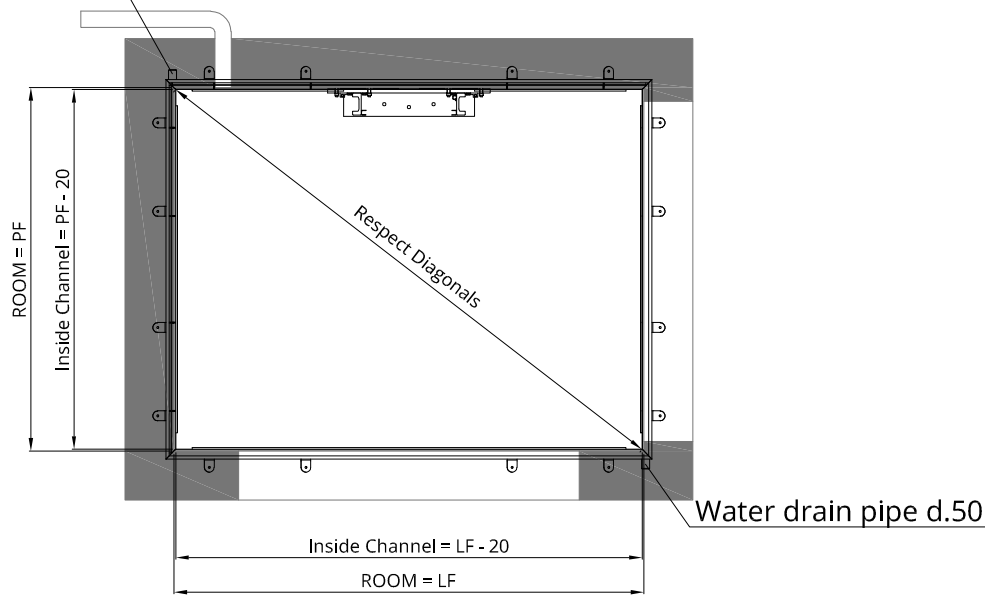

MARK THE ENTRANCES AND THE HEIGHT OF FLOOR

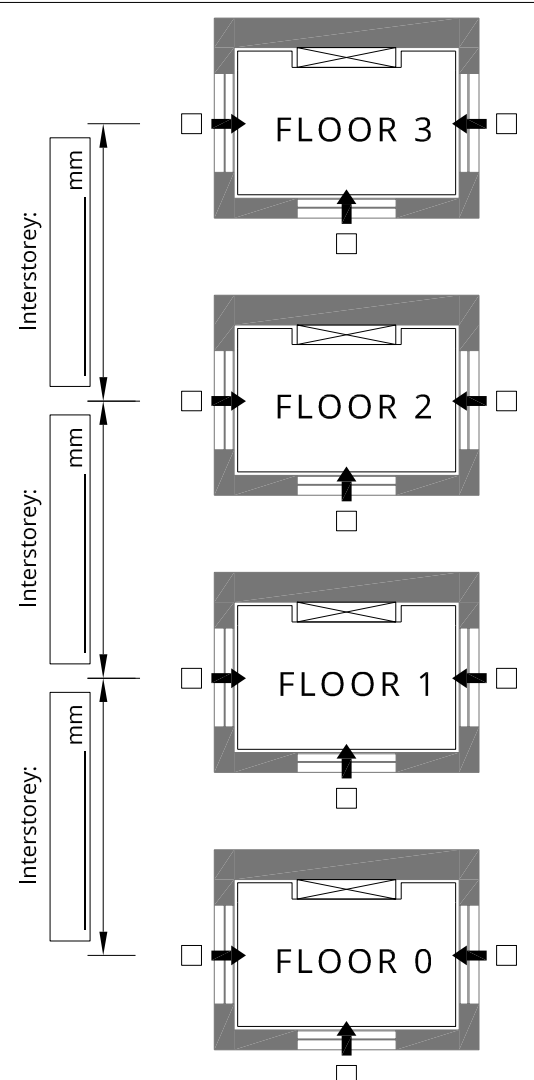


Motor	Tension-functioning	Starter	Suggested switch*	Rated current	Current starter
3kW	220 V - 3ph	Direct	3x16A id=0,3A	10	35
	380 V - 3ph	Direct	4x16A id=0,3A	5	22
4kW	220 V - 3ph	Direct	3x20A id=0,3A	16	50
	380 V - 3ph	Direct	4x16A id=0,3A	8	25
5,5kW	220 V - 3ph	Direct	4x25A id=0,3A	22	60
	380 V - 3ph	Direct	4x16A id=0,3A	11	35

MODEL: UP15RT - 1500Kg UP20RT - 2000Kg


Date: _____ Signature for approval: _____

MISURE IN mm

FLATBED DIMENSION (grey area)

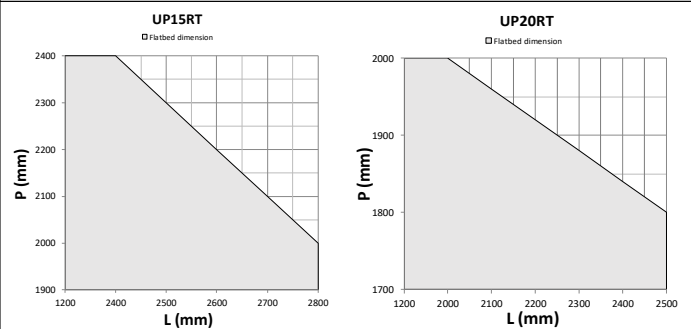

Force on the wall, Fx function of depth flatbed

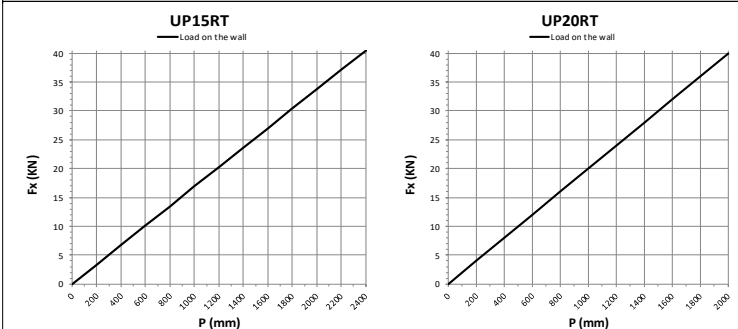

directlifts 1300 240 298 | info@directlifts.com.au | www.directlifts.com.au

Q.TA	DESCRIZIONE:	Cliente:
	MODEL: UP15-20RT SPB	Disegno n°:
	STROKE MAX: 12000mm	TAV-UP15-20RTSPB-PIT
	PIT DETAILS UP SPB	Sostituto dat.:
		Sostitutore it.: