

Motor	Tension-functioning	Starter	Suggested switch*	Rated current	Current starter
3kw	220 V - 3ph	Direct	3x16A id=0,3A	10	35
	380 V - 3ph	Direct	4x16A id=0,3A	5	22
4kw	220 V - 3ph	Direct	3x20A id=0,3A	16	50
	380 V - 3ph	Direct	4x16A id=0,3A	8	25
5,5kw	220 V - 3ph	Direct	4x25A id=0,3A	22	60
	380 V - 3ph	Direct	4x16A id=0,3A	11	35


MODEL: UP15RT - 1500Kg UP20RT - 2000Kg

Date: _____ Signature for approval: _____




MISURE IN mm

FLATBED DIMENSION (grey area)

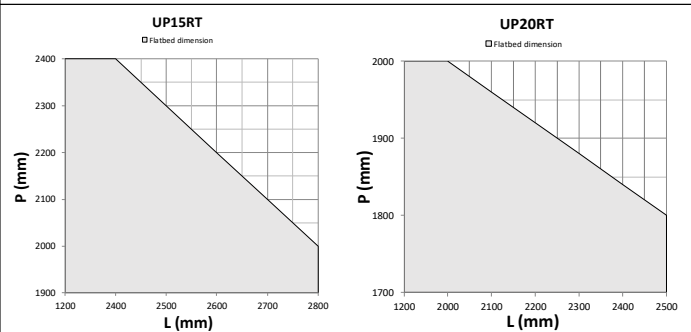

Force on the wall, Fx function of depth flatbed

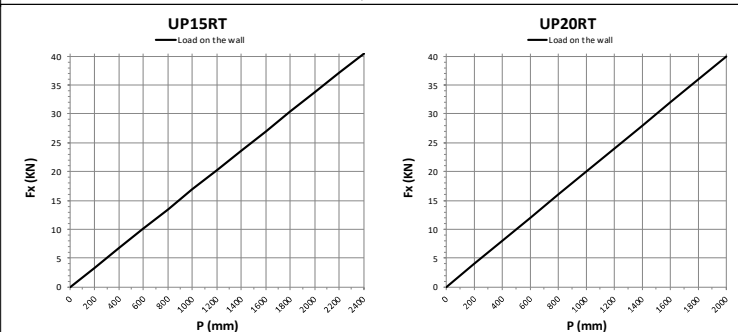

directlifts 1300 240 298 | info@directlifts.com.au | www.directlifts.com.au

Q.TA

DESCRIZIONE:

MODEL: UP15-20RT

STROKE MAX: 12000mm
ONLY FOR GOODS

Clijente:

Designo n°: _____ Data: 10/09/19

TAV-UP15-20RT-STD01


Sostituto dat.:

Sostitutore it.:




Formato A3

Foglio




Scale

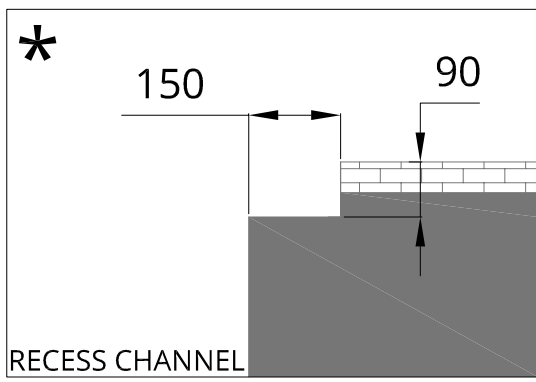

* Predisposition recess channel provided by the customer

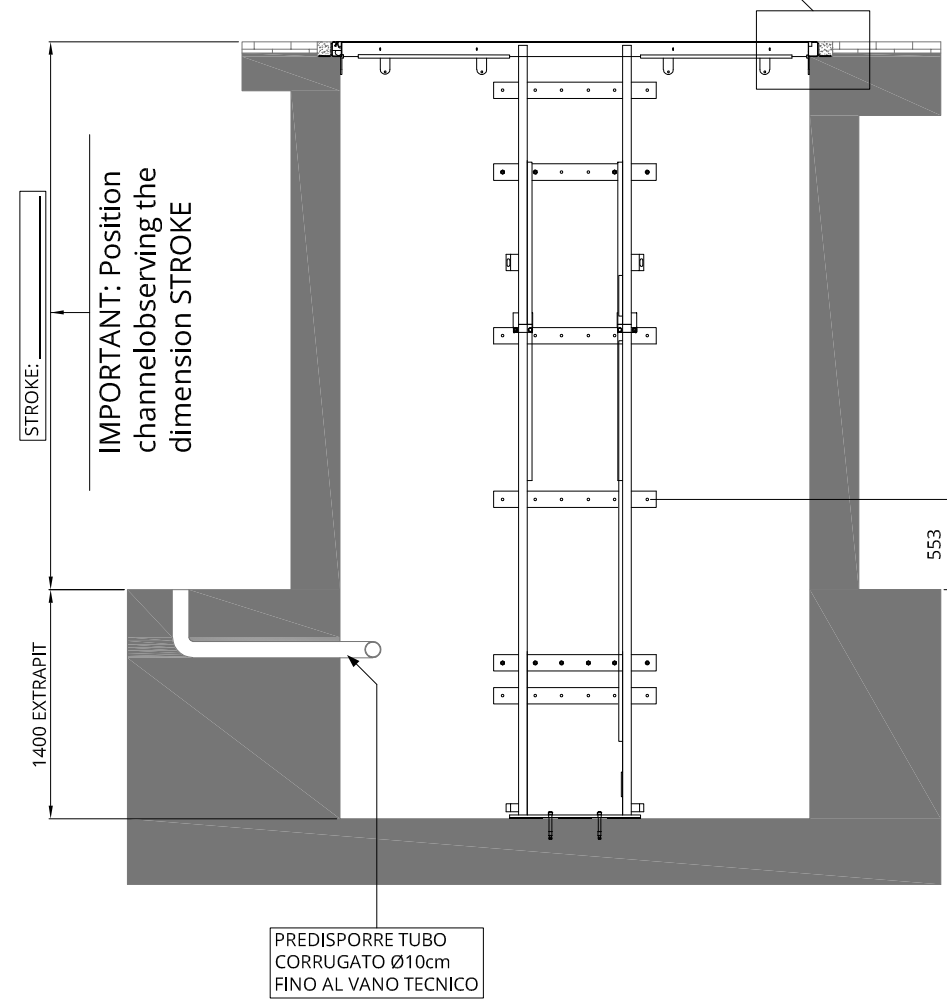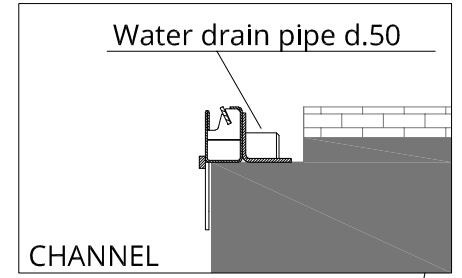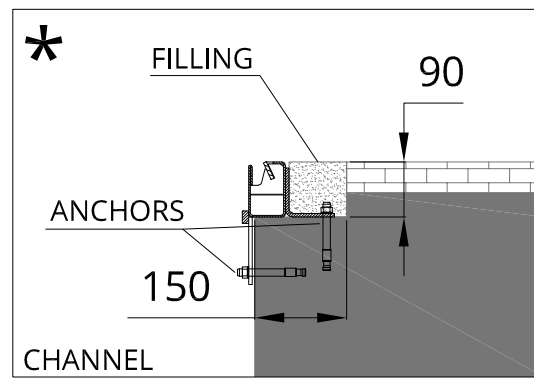

IMPORTANT: Position guides observing the dimension indicated by the channel and check 573 from the downstairs level

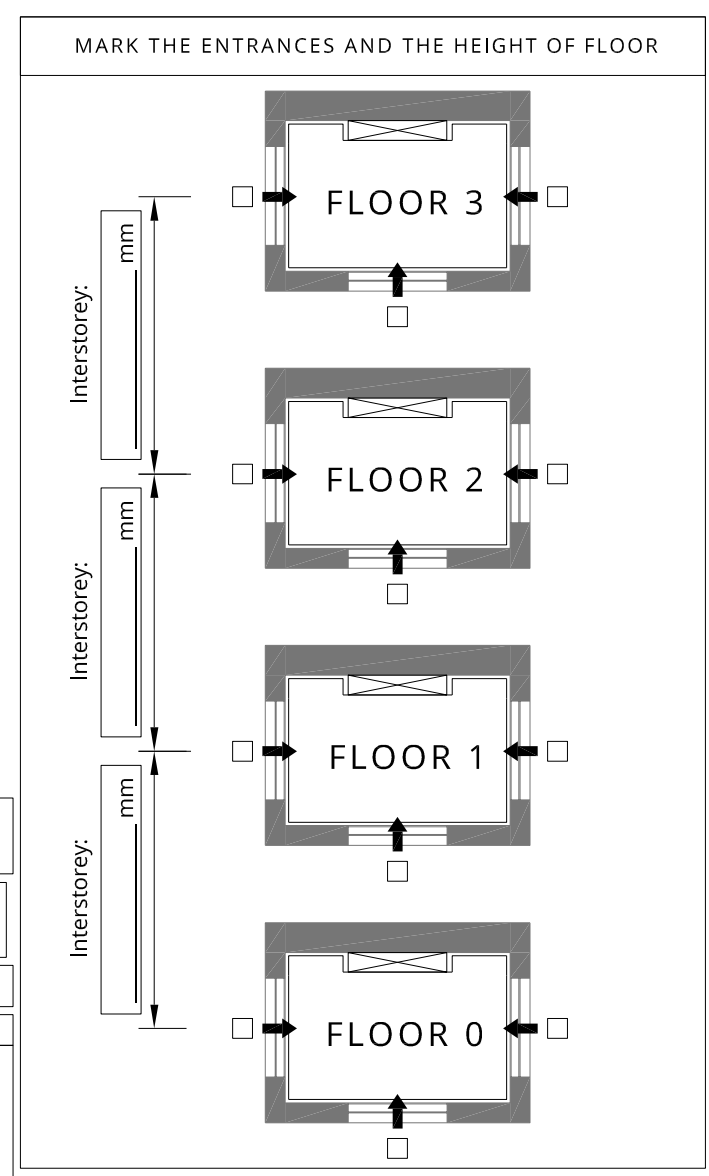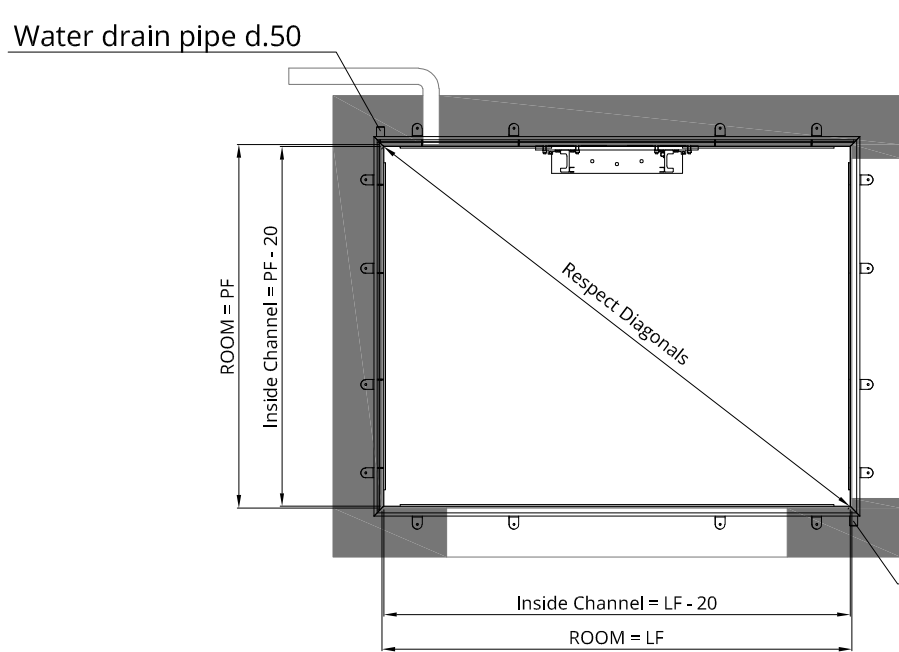
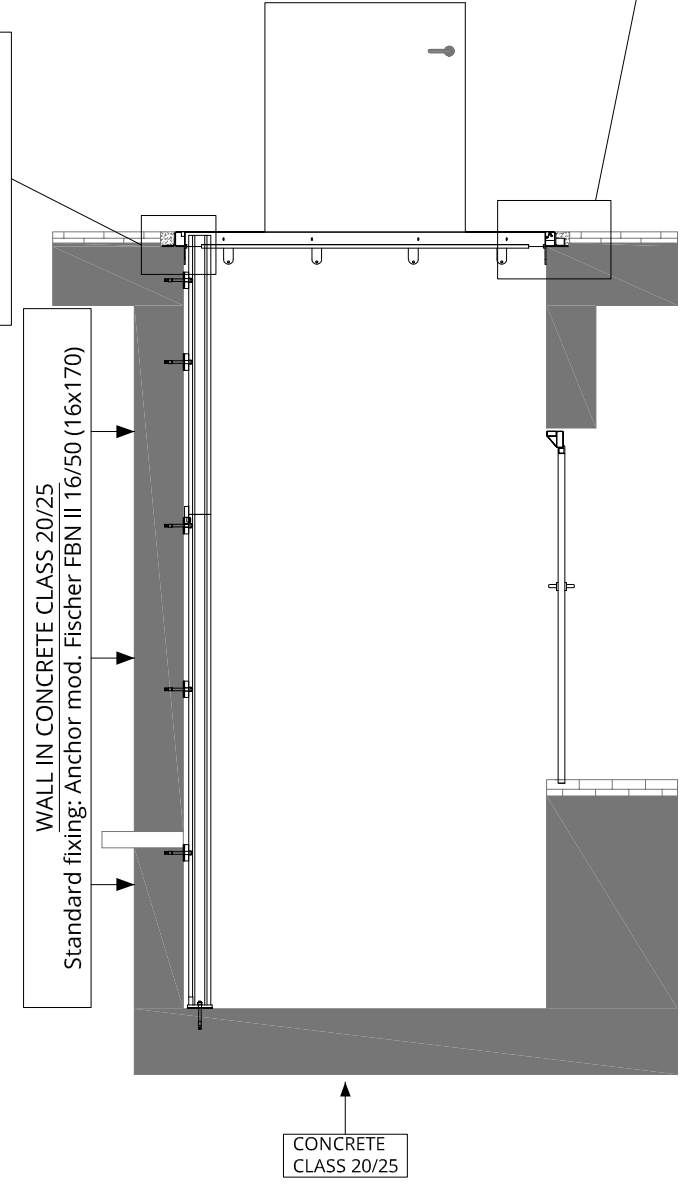


Motor	Tension-functioning	Starter	Suggested switch*	Rated current	Current starter
3kW	220 V - 3ph	Direct	3x16A id=0,3A	10	35
	380 V - 3ph	Direct	4x16A id=0,3A	5	22
4kW	220 V - 3ph	Direct	3x20A id=0,3A	16	50
	380 V - 3ph	Direct	4x16A id=0,3A	8	25
5,5kW	220 V - 3ph	Direct	4x25A id=0,3A	22	60
	380 V - 3ph	Direct	4x16A id=0,3A	11	35

MODEL: UP15RT - 1500Kg UP20RT - 2000Kg

Date: _____ Signature for approval: _____

MISURE IN mm

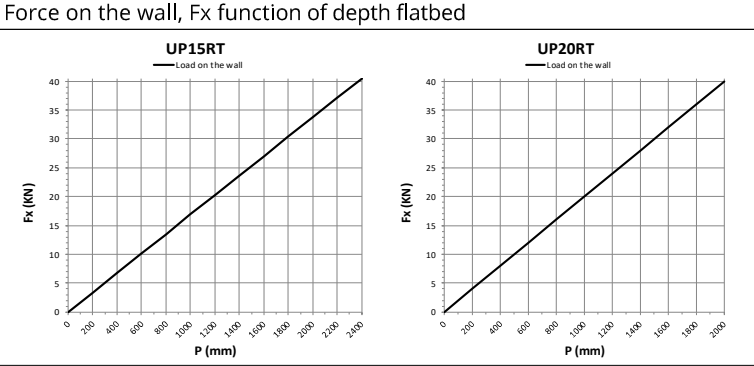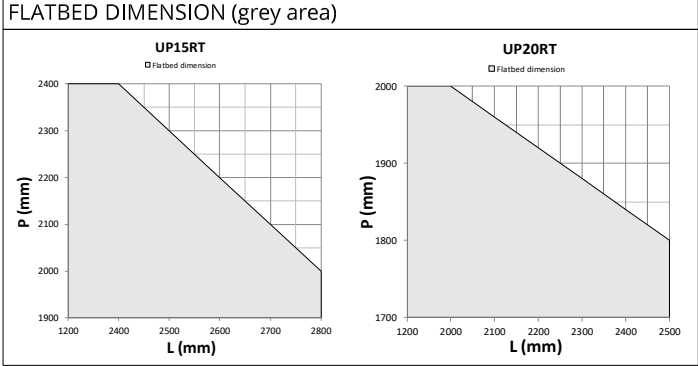

directlifts

Q.TA DESCRIZIONE: MODEL: UP15-20RT

STROKE MAX: 12000mm

PIT DETAILS

Clijente: _____

Disegno n°: TAV-UP15-20RT-PIT

Data: 10/09/19

Scale: A3