
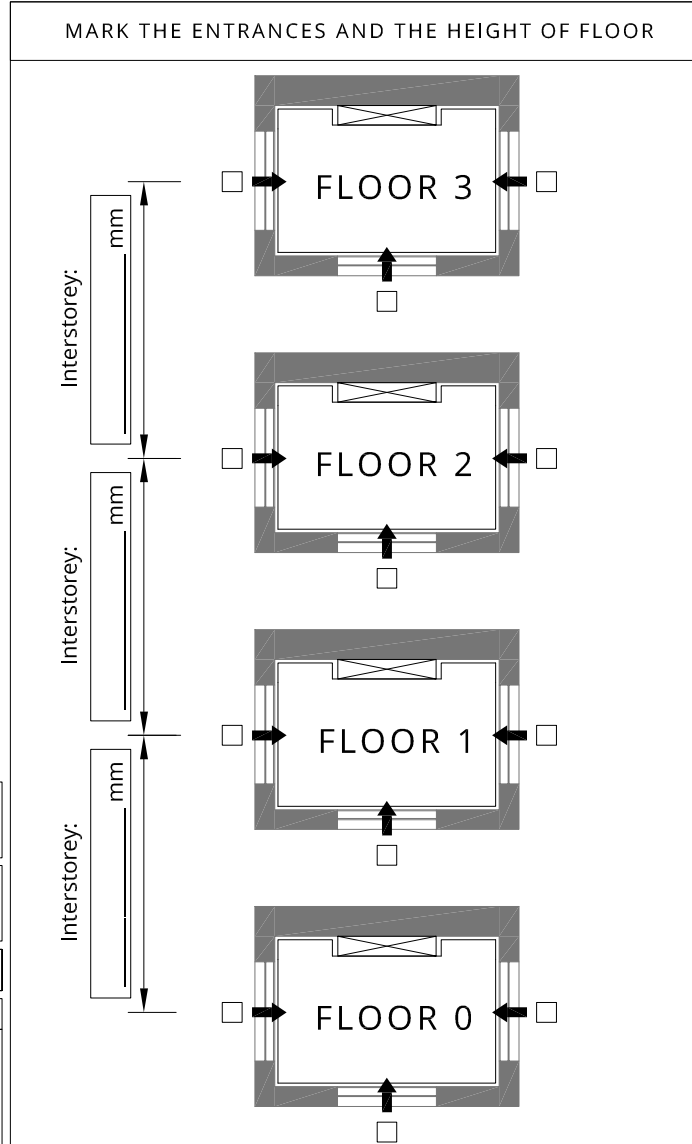
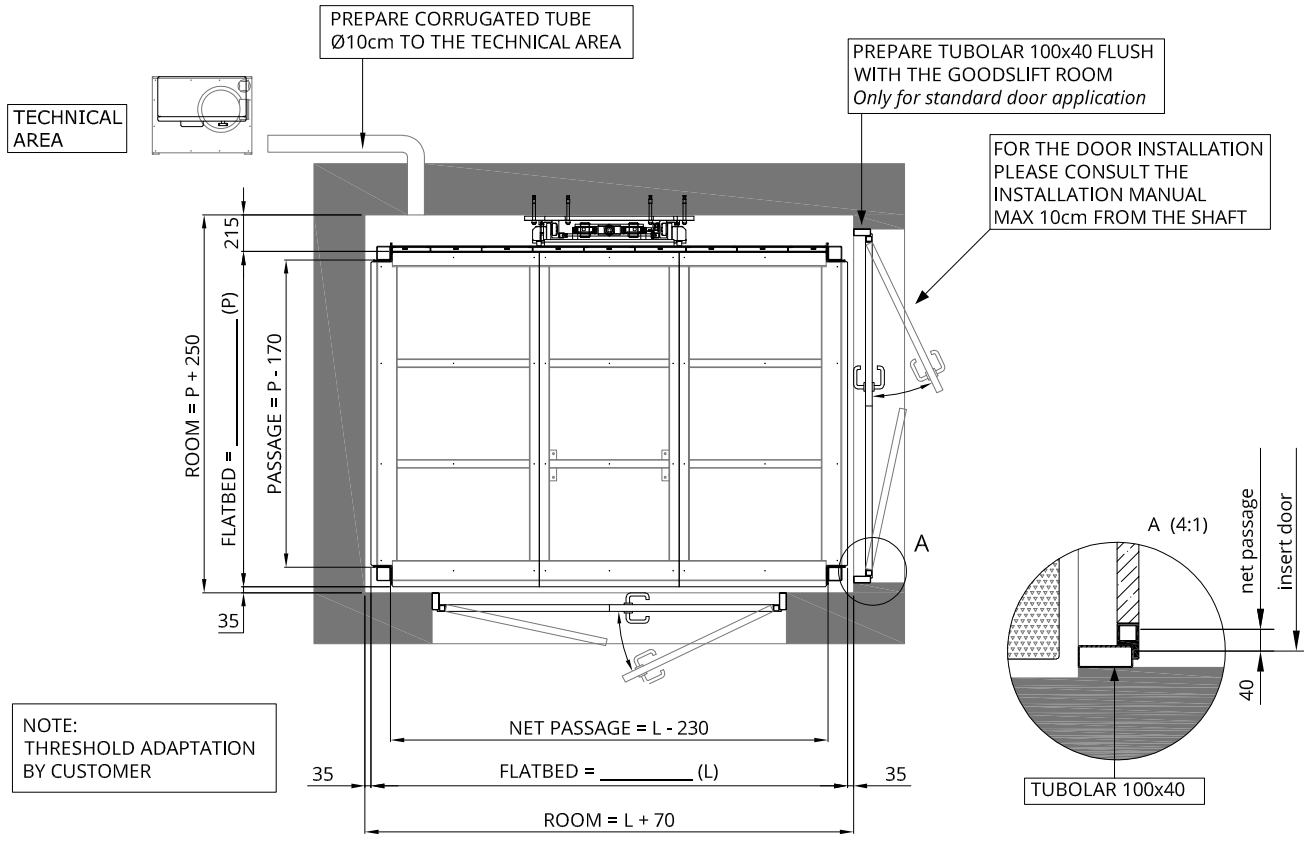
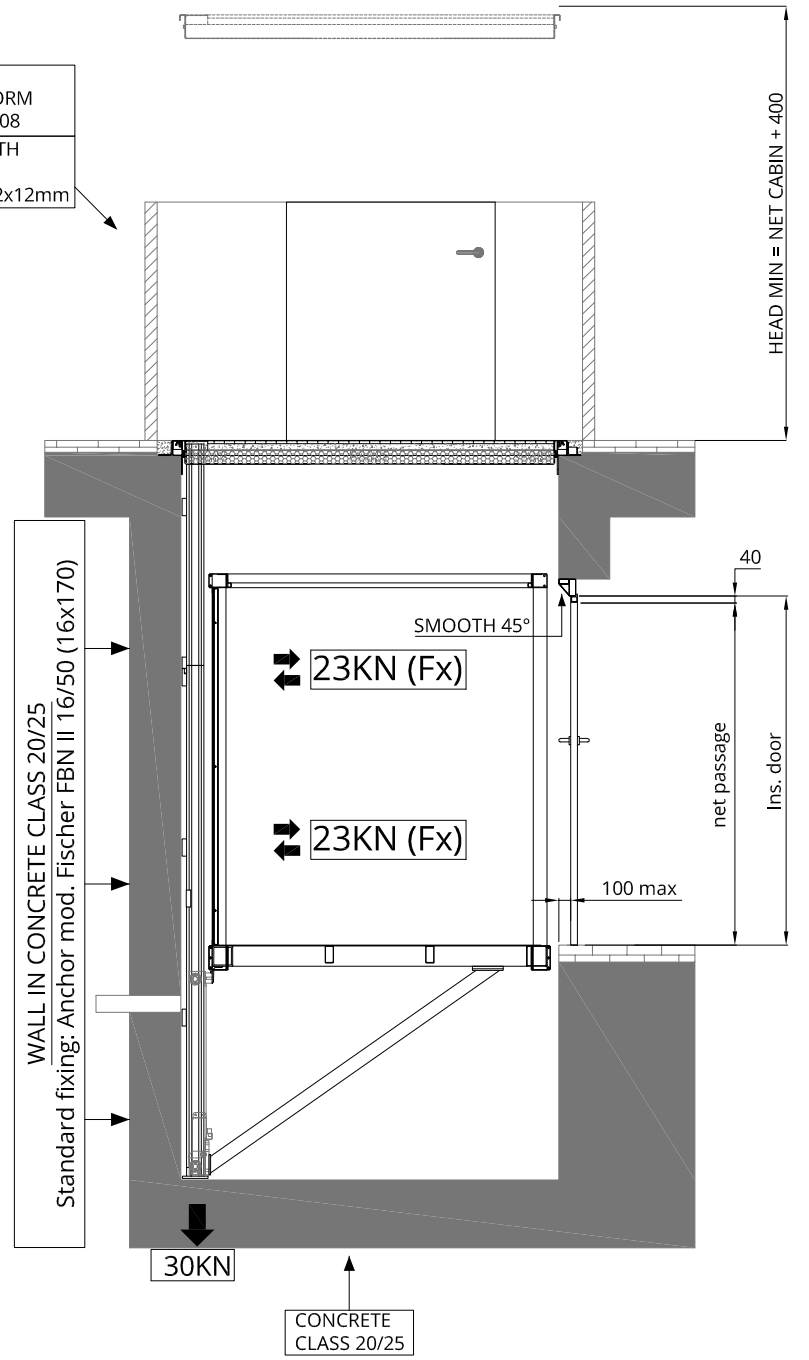


PROTECTION OF THE COMPARTMENT: NORM UNI-EN-ISO-13857:2008
FOR PROTECTION WITH METALLIC GRID, USE A COMPACT MESH 12x12mm


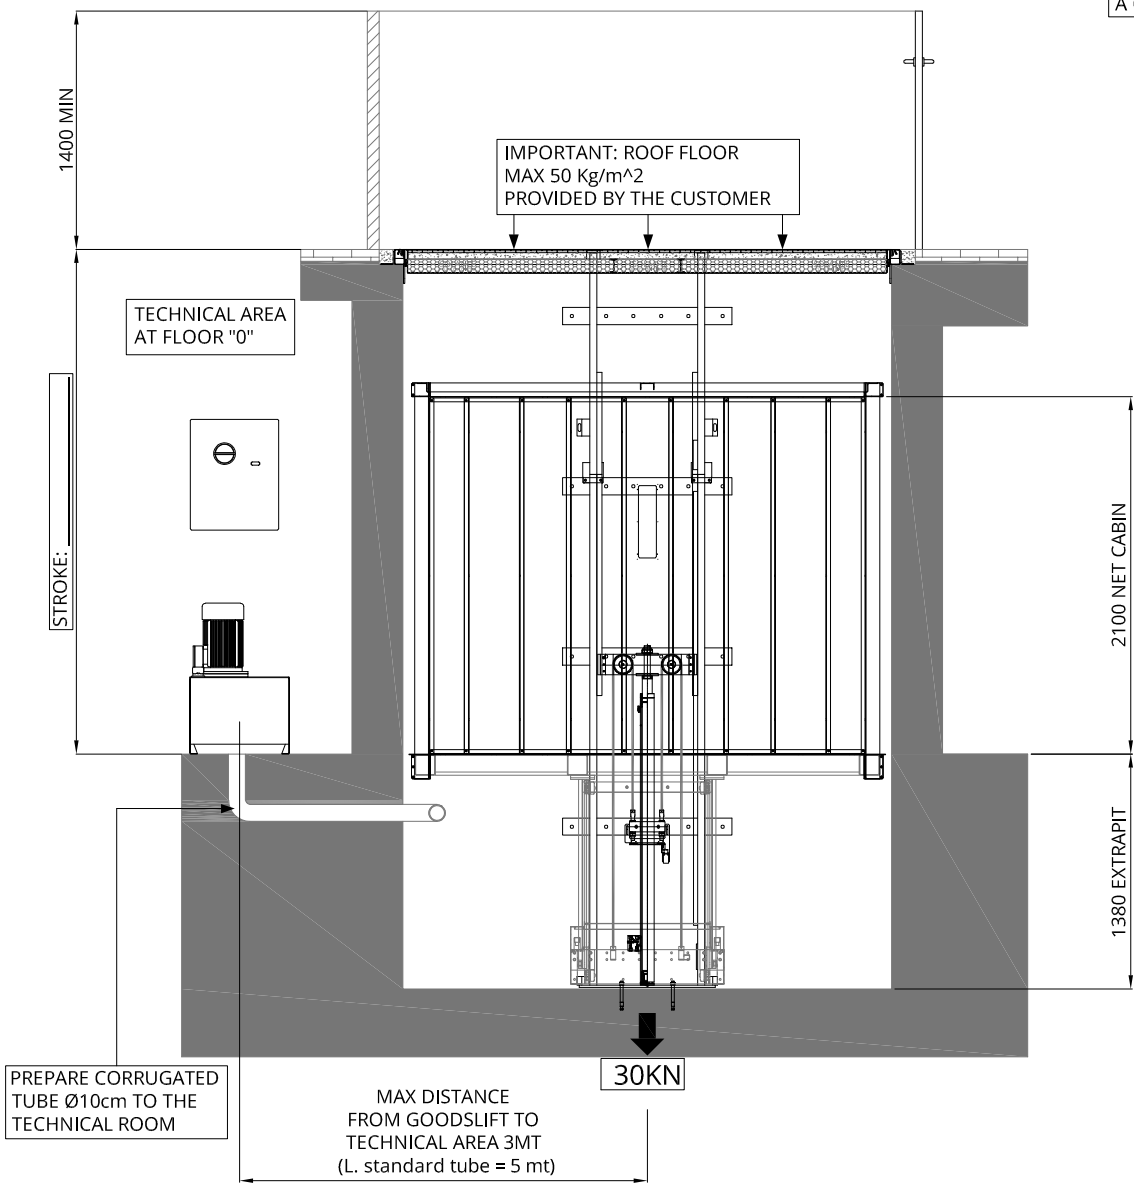


Motor	Tension-functioning	Starter	Suggested switch*	Rated current	Current starter
3kW	220 V - 3ph	Direct	3x16A id=0,3A	10	35
	380 V - 3ph	Direct	4x16A id=0,3A	5	22
4kW	220 V - 3ph	Direct	3x20A id=0,3A	16	50
	380 V - 3ph	Direct	4x16A id=0,3A	8	25
5,5kW	220 V - 3ph	Direct	4x25A id=0,3A	22	60
	380 V - 3ph	Direct	4x16A id=0,3A	11	35

MODEL: UP5RT - 500Kg UP10RT - 1000Kg

Date: _____ Signature for approval: _____






MISURE IN mm

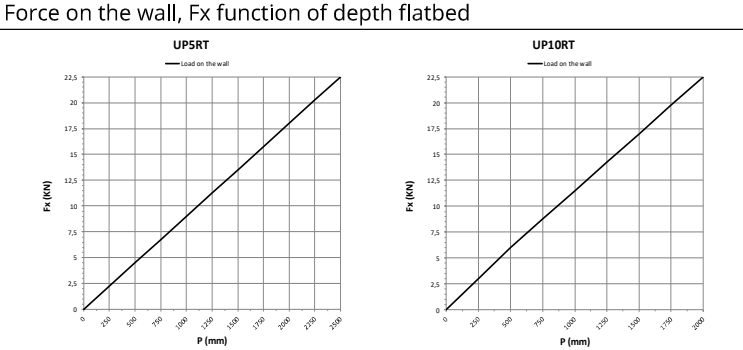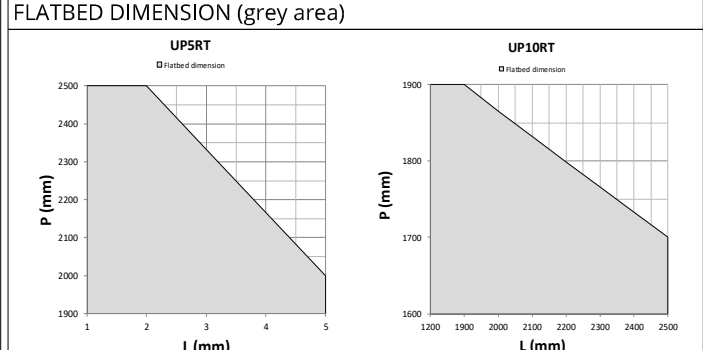




directlifts

Q.TA DESCRIZIONE: MODEL: UP5-10RT SPB STROKE MAX: 12000mm WITH OPERATOR ON BOARD

Cliente: _____ Data: 09/09/19
Disegno n.: TAV-UP5-10RT-SPB01
Sostituto dat.: _____
Sostitutore it.: _____

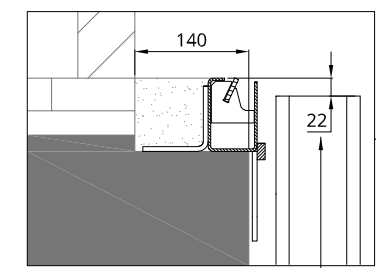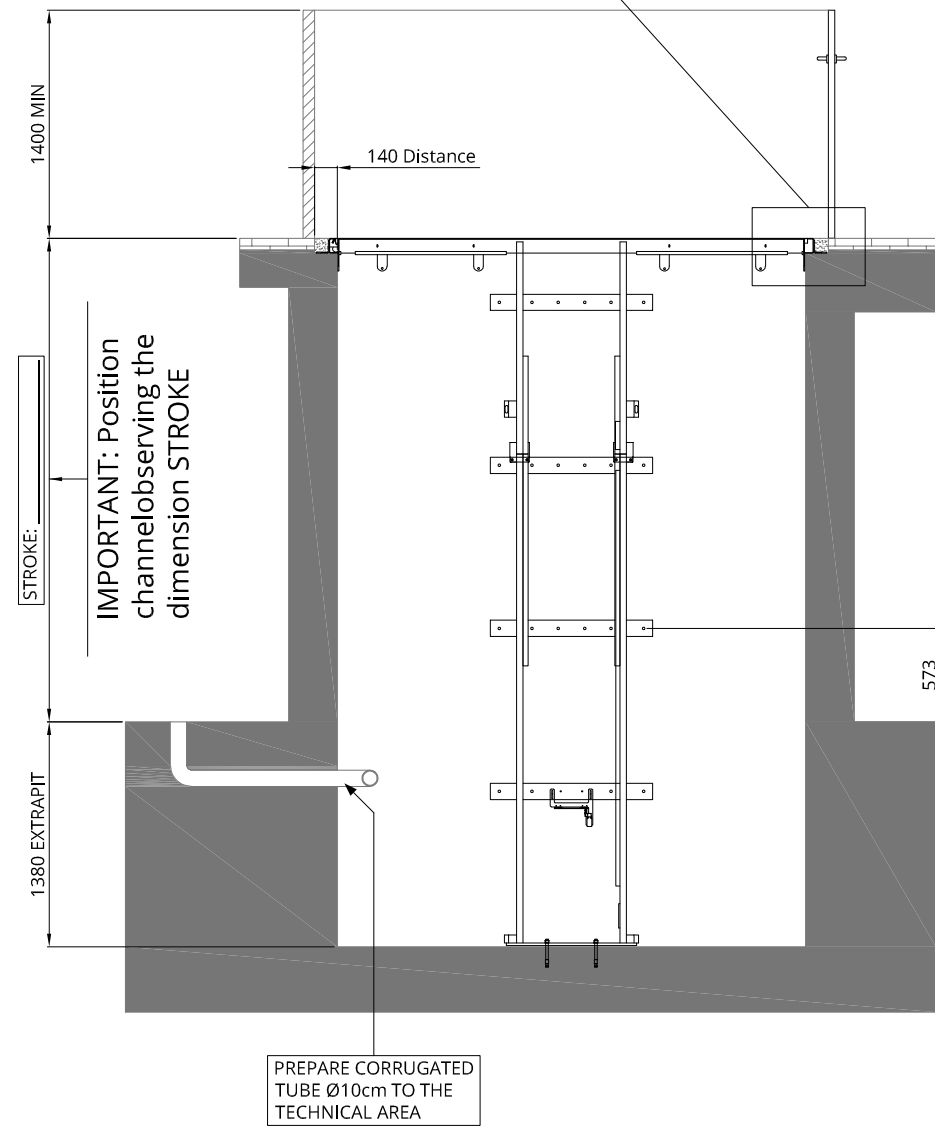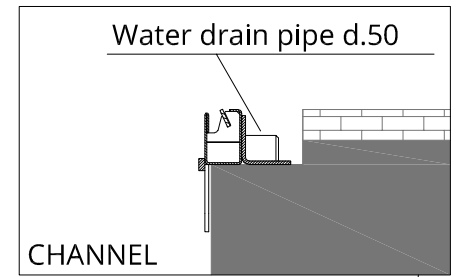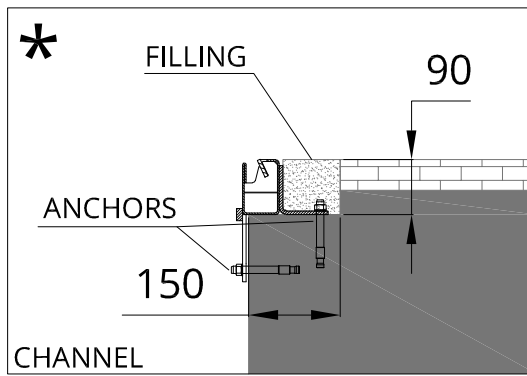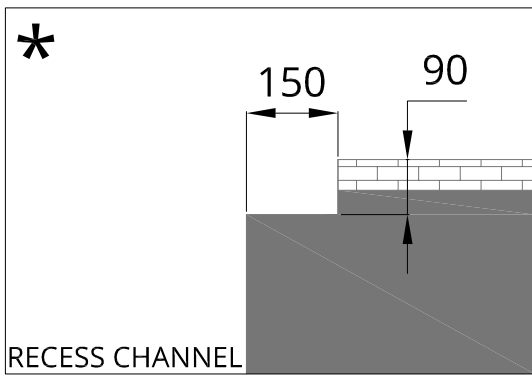

IMPORTANT: Position guides observing the dimension indicated by the channel and check 573 from the downstairs level

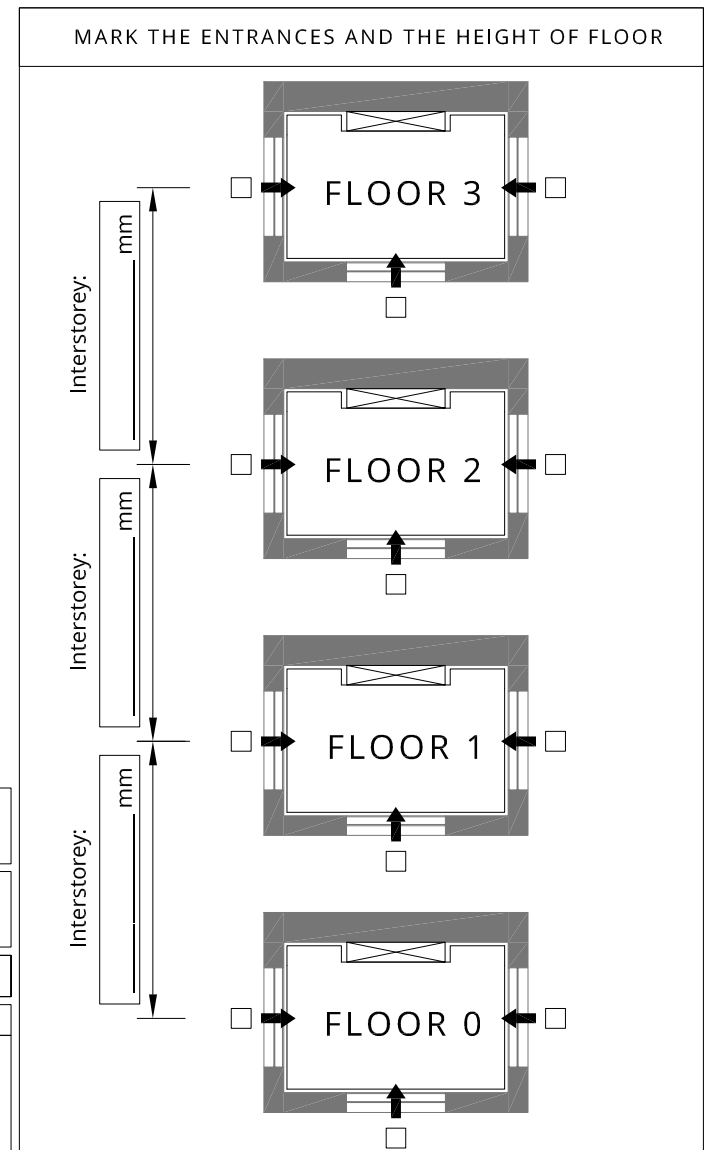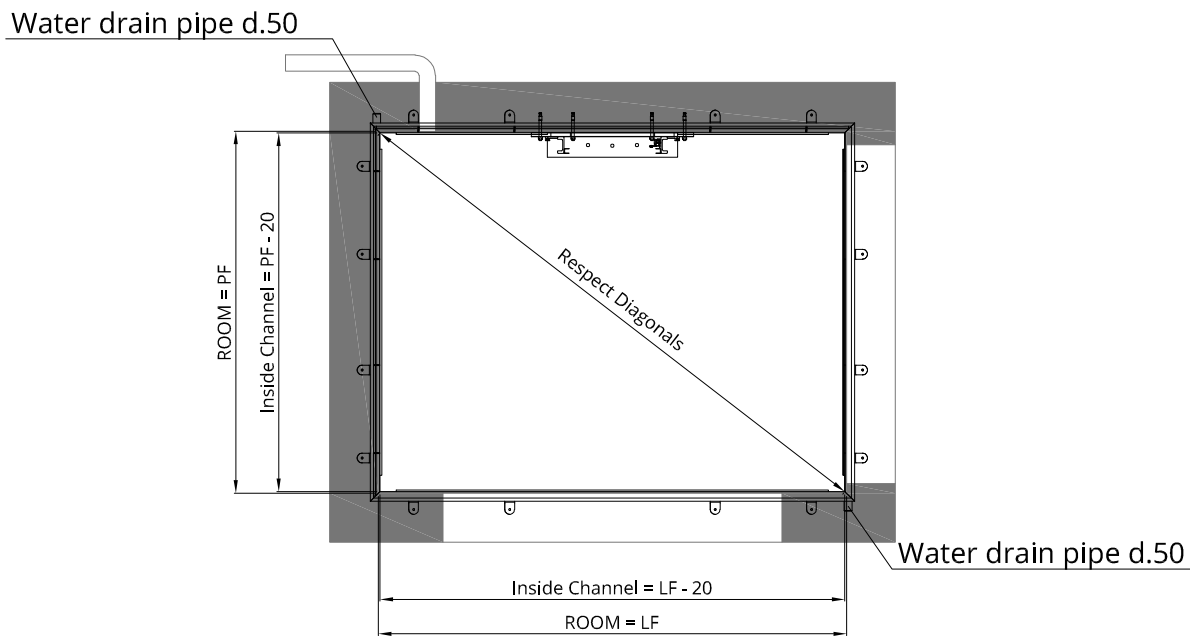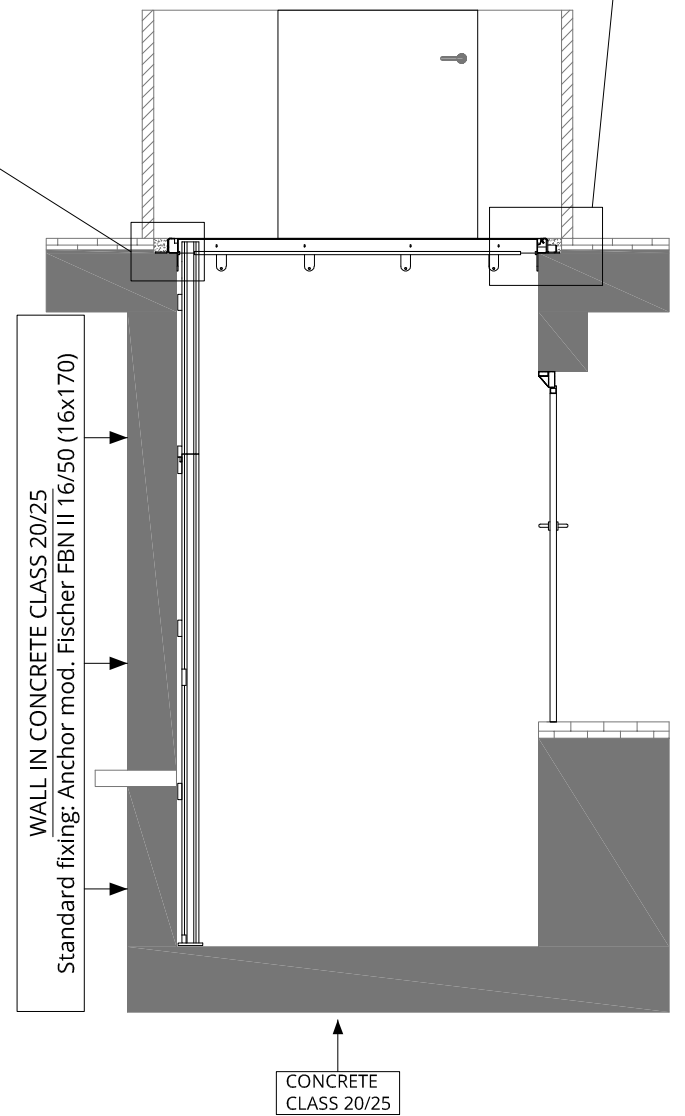

PREPARE POWER 3F+T+N SWITCH AUTOMATIC MAGNETOTHERMIC WITH DIFFERENTIAL CURVE "C", Id = 0.3A					
Motor	Tension-functioning	Starter	Suggested switch*	Rated current	Current starter
3kW	220 V - 3ph	Direct	3x16A id=0,3A	10	35
	380 V - 3ph	Direct	4x16A id=0,3A	5	22
4kW	220 V - 3ph	Direct	3x20A id=0,3A	16	50
	380 V - 3ph	Direct	4x16A id=0,3A	8	25
5,5kW	220 V - 3ph	Direct	4x25A id=0,3A	22	60
	380 V - 3ph	Direct	4x16A id=0,3A	11	35


MODEL: UP5RT - 500Kg UP10RT - 1000Kg

Date: _____ Signature for approval: _____




MISURE IN mm

FLATBED DIMENSION (grey area)

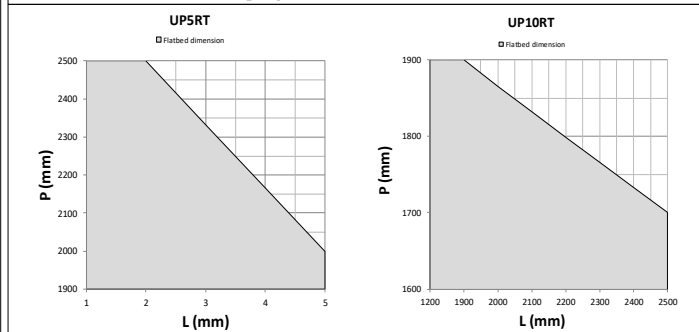

Force on the wall, Fx function of depth flatbed

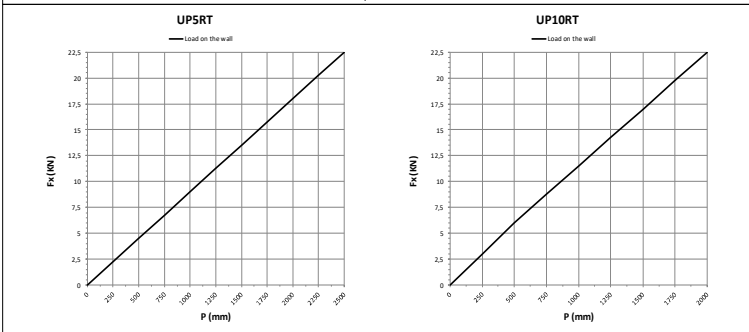

directlifts 1300 240 298 | info@directlifts.com.au | www.directlifts.com.au

Q.TA DESCRIZIONE: MODEL: UP5-10RT SPB

STROKE MAX: 12000mm

PIT DETAILS UP SPB

Cliente: _____

Disegno n°: TAV-UP5-10RTSPB-PIT

Data: 09/09/19

Sostituto dot. _____

Sostitutrice it. _____