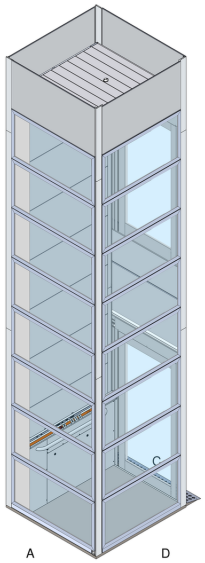



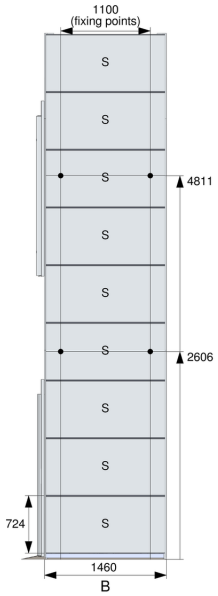

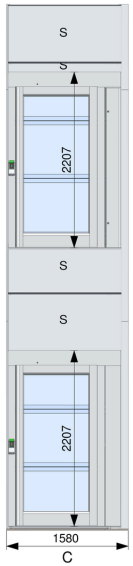

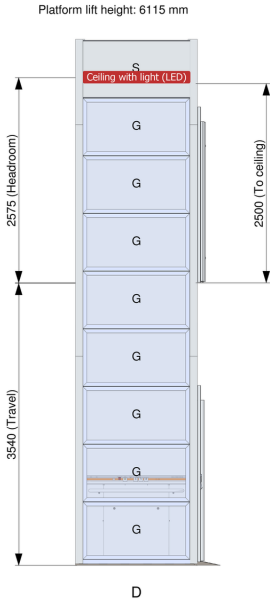

Technical specifications:
System: screw-driven
Rated load: 400 kg
Speed: 0.15 m/sec
Platform dimensions: 1100 x 1400 mm
Shaft dimensions: 1580 x 1460 mm
Floor slab hole: 1620 x 1500 mm
Travel: 3540 mm
RAL 9006 (anodized aluminum)
2 stops
Power supply 220 V, 1 phase, 50 Hz, C25
Frequency converter: Included
Keyboard language: English
Application: Internal

Remarks:
Load - 13.7 kN/m2.
Electricity 3 x 4 mm2

Door:
2 Aluminum with glass (standard) door 900 x 2000 (right, Manual (standard))
Ramp (1 pcs.)

Additional equipments:
Ceiling with light (LED Spots)
Safeline MX2
Braille on the plaform
Braille on the call button
Additional Control Operating Panel
Packaging into wooden boxes (air freight)
Logo on the control panel: Only Client logo
Control panel strip color: Silver

	Serial no	Principal drawing 1100 x 1400 mm
	Order no	General

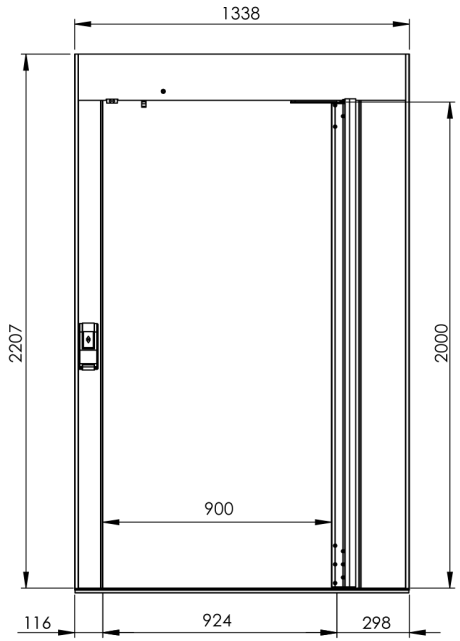

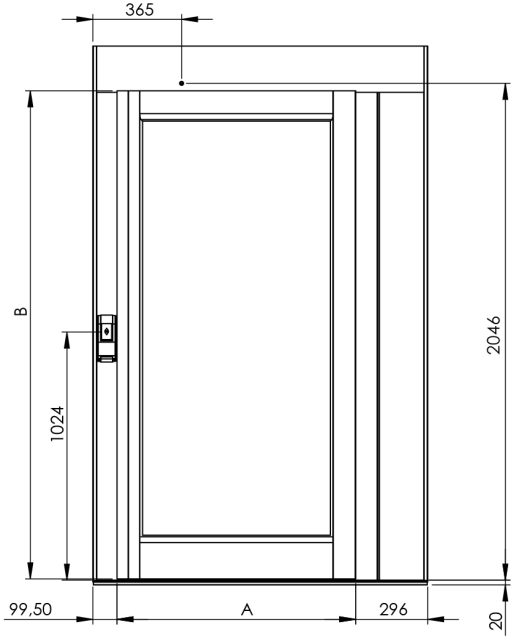

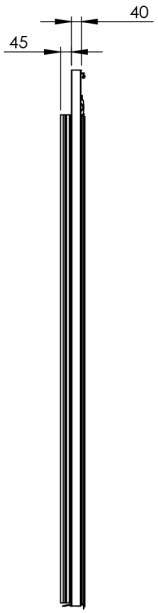

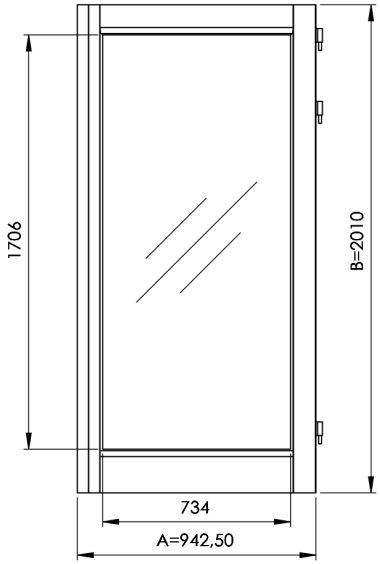

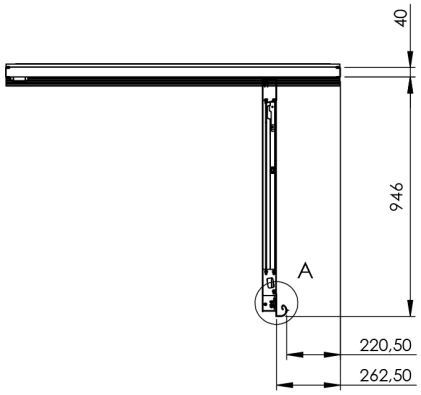



Selections:
Ramp

Serial no	
Order no	
Date	

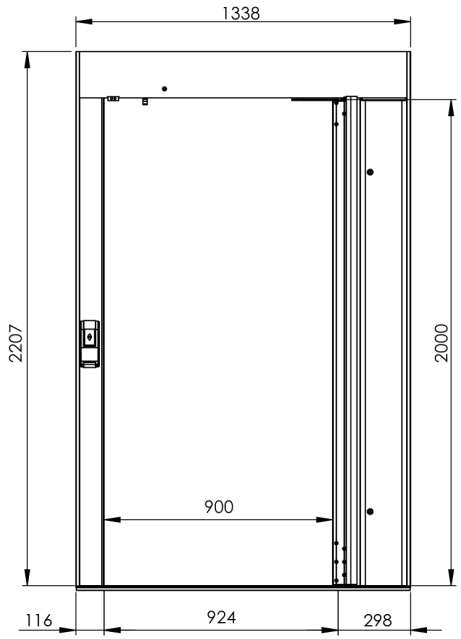

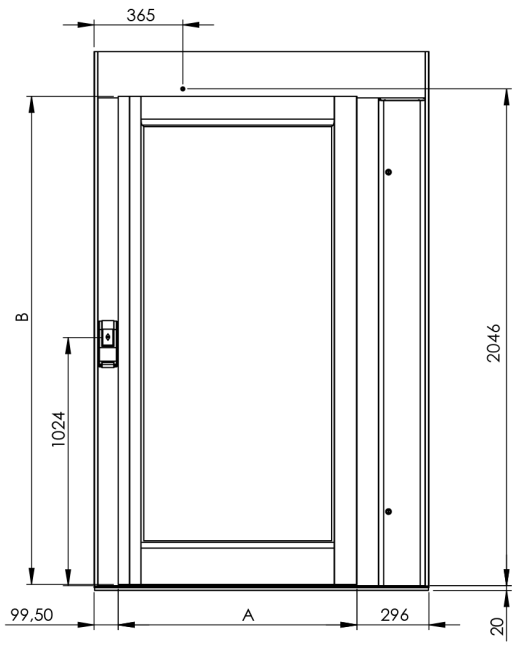

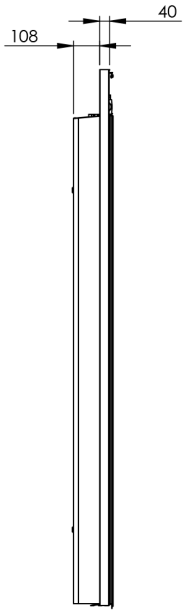

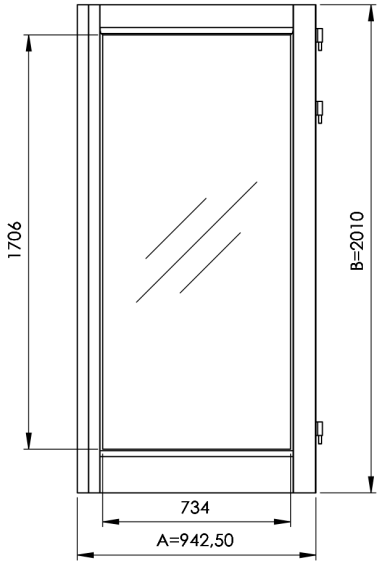

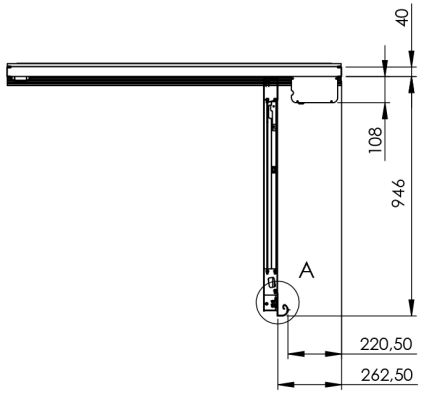



Selections:
-

	Serial no	
	Order no	
	Date	