


Direct Lifts Australia

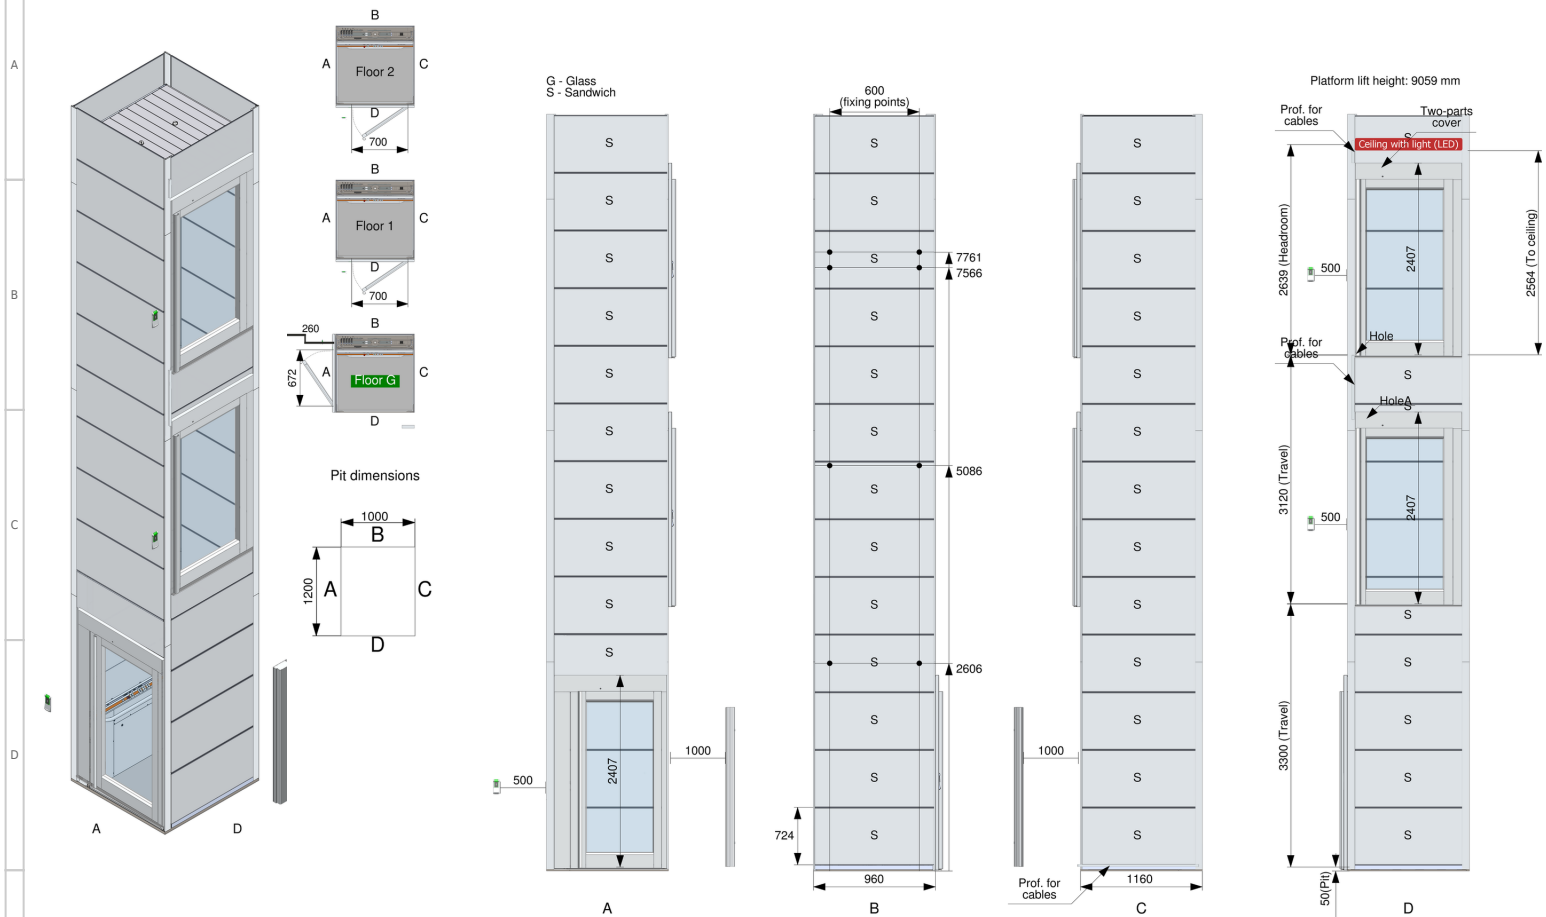

Technical specifications:
System: screw-driven
Rated load: 250 kg
Speed: 0.15 m/sec
Platform dimensions: 770 x 905 mm
Shaft dimensions: 1160 x 960 mm
Footprint dimensions: 1200 x 1000 mm
Pit 50 mm
Travel: 6420 mm
RAL 9010 (painted)
3 stops
Power supply 220 V, 1 phase, 50 Hz, C25
Frequency converter: Included
Keyboard language: English
Application: Internal







Remarks:
Load - 13.7 kN/m2.
Electricity 3 x 4 mm2

Door:
1 Aluminum with glass (standard) door 672 x 2200 (right, Manual (standard))
2 Aluminum with glass (standard) door 700 x 2200 (right, Manual (standard))

Additional equipments:
Ceiling with light (LED Spots)
Telephone on the platform
Reinforced guide rails
Platform floor without rubber
One touch operation
Packaging on the heated wood pallets
Logo on the control panel: Only Client logo
Control panel strip color: Silver

Serial no	Principal drawing 770 x 905 mm General
Order no	
Date	







Direct Lifts Australia

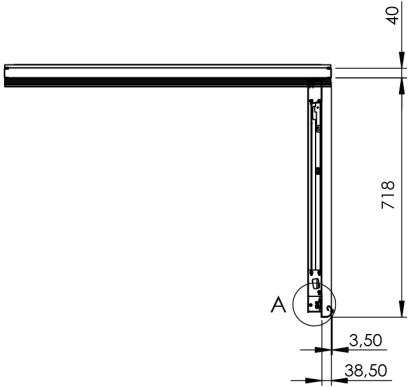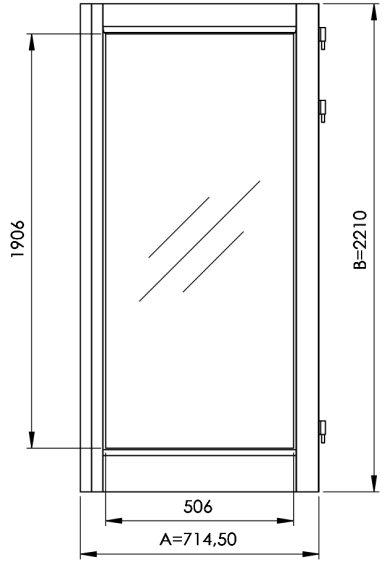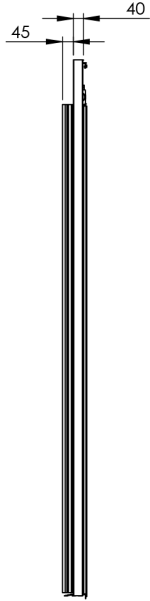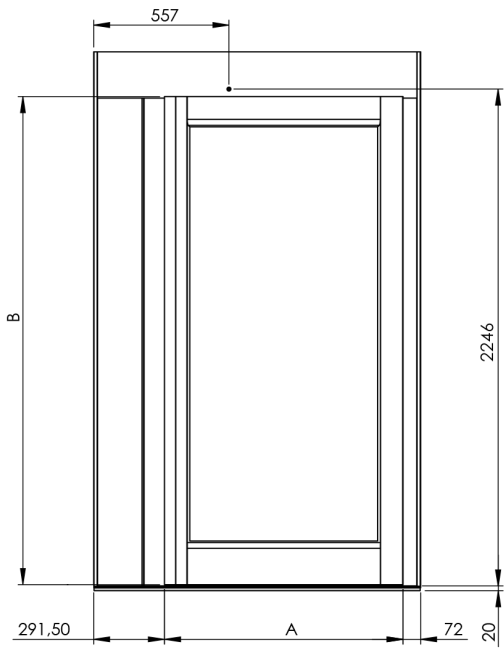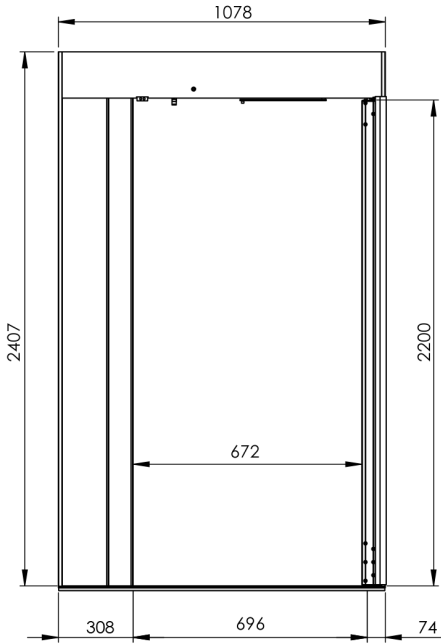

Selections:









Serial no	
Order no	
Date	

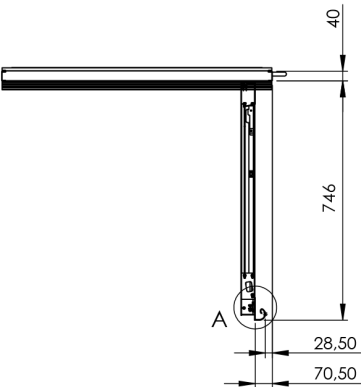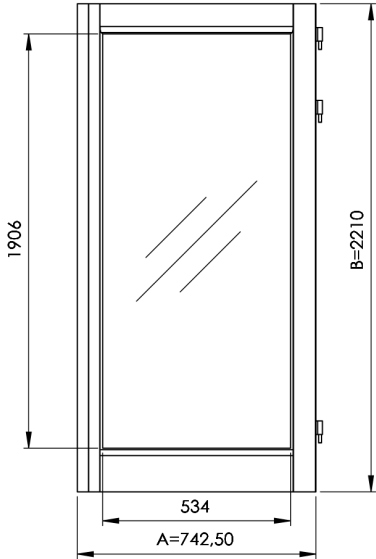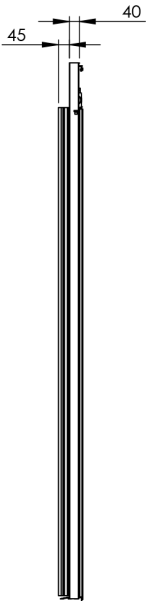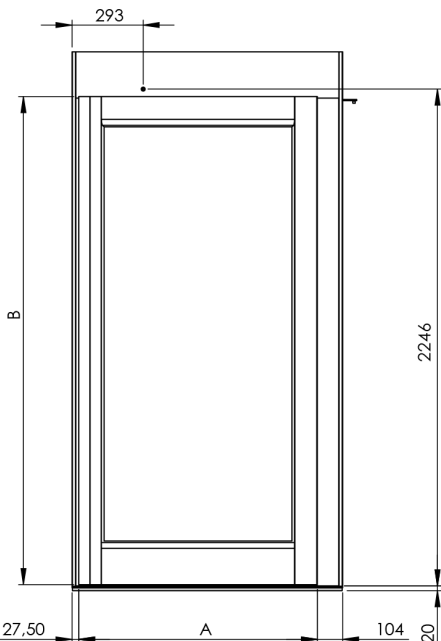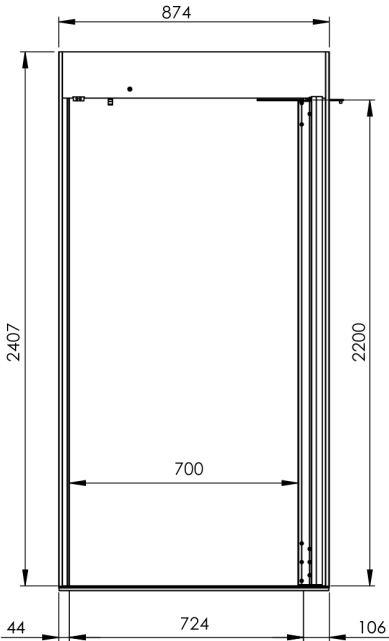

Selections:



Serial no	Principal door drawing Floor 1, side D K.p.d.-D.p.d.-(-72)-D
Order no	
Date	

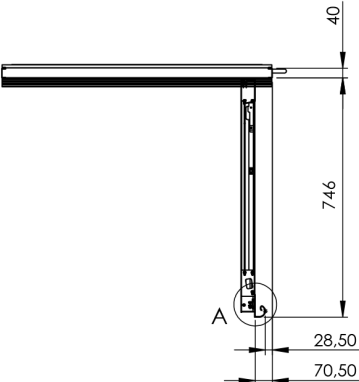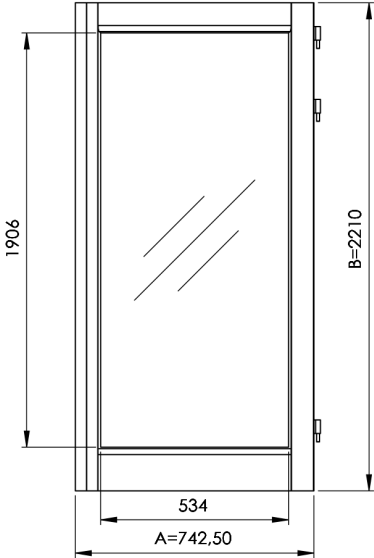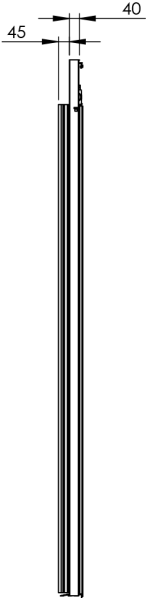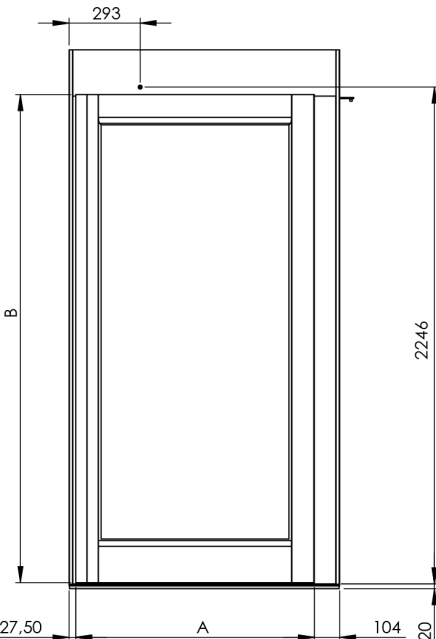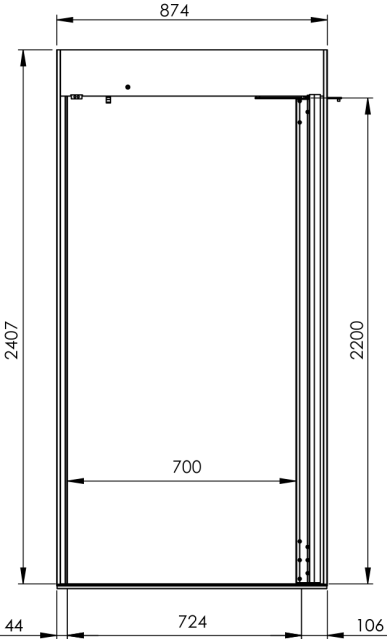

Selections:



Serial no	Principal door drawing Floor 2, side D K.p.d.-D.p.d.-(-72)-D
Order no	
Date	