


Please check:

number of steps: 5
 depth over all steps: 990mm
 vertical: 725mm
 height step 1: 175mm
 height last step: 181mm
 nose to nose: 1227mm

Platform Lift STRAIGHT EN81-40 compliant
 Right hand (as viewed from lower level)
 Platform Size: 1210x830mm
 Platform 225kg Loading capacity
 Powder coated in standard RAL 9006
 Mounting: wall
 2x Wall mounted operating unit incl. keyswitch
 Outside installation

Platform folding support

date, sign

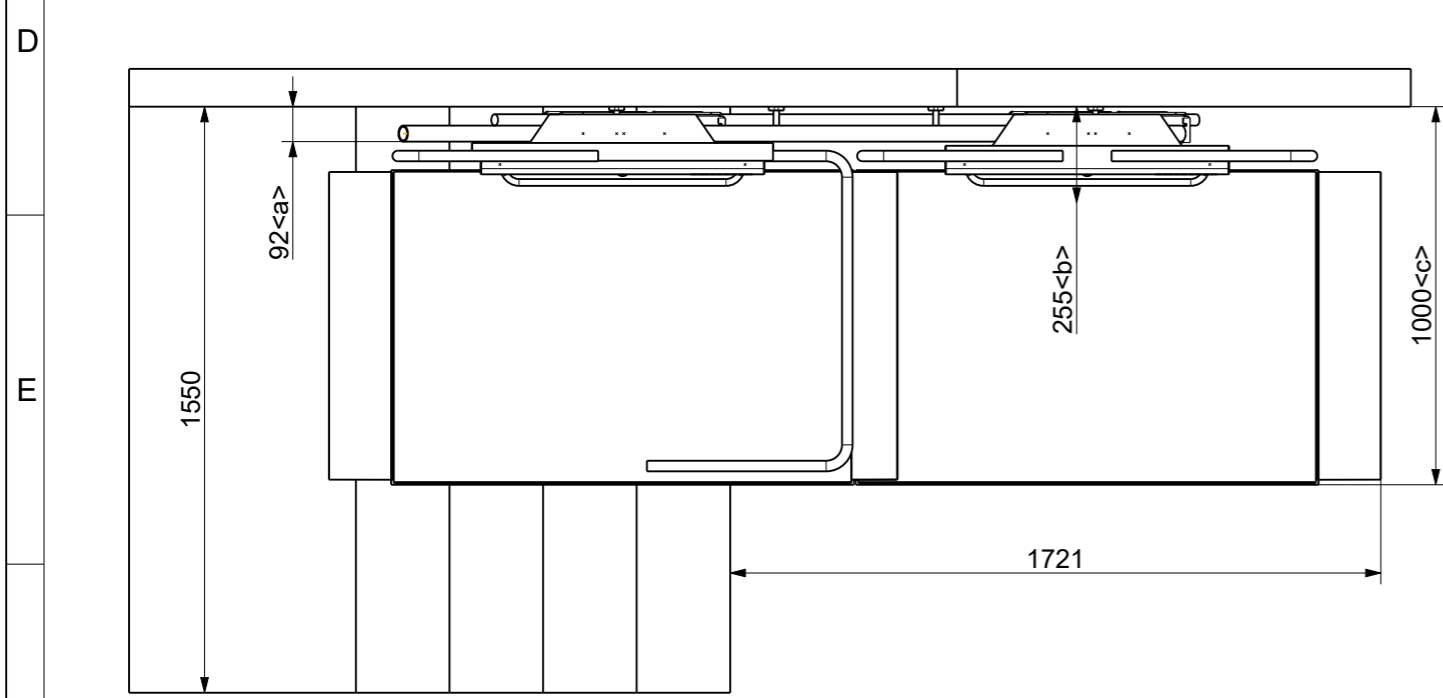

<a> ... required space rail
 ... required space Platform closed
 <c> ... required space Platform open

Zuschnitt Abdeckung:
 Winkel=36.216°
 X=509mm // Y=146mm

230V power supply line (cable 3x1.5mm²) to the desired mounting point of the battery charger must be supplied on site. Additional earth connection on the rail/stanchions (min. 6mm²) required. Furthermore, fuse protection with a maximum of 13A and an earth-leakage circuit breaker with a tripping fault current of 0.03A must be provided. Adequate staircase lighting which is independent of a timer must be provided by the customer. A minimum light intensity of 50 lux must be available. The operator guarantees that there are no supply lines (underfloor heating, electricity, gas, water pipes, etc.) in the area of the stanchions or wall fixings. Shearing and crushing points that are closer than 100mm to non-contact protected moving parts of the system must be fully covered on site. A full-surface rail covering in accordance with the applicable building regulations must be provided by the customer. The user should carry a fully functional mobile phone with him/her on each journey.

				Dateityp:				
				Allgemeintol. DIN ISO 2768-m-S		Maßstab 1:20		
						Werkstoff: Halbzeug: PLG7-10-0xxxx		
				Datum	Name	Benennung: Direct Lifts Australia Neutral Bay		
				Bear.	09.03.2022			Mayrhofer
				Gepr.				
				Norm				
						Zeichnungsnummer:		
						(Ers.f.):	(Ers.d.):	
Zust.	Änderung	Datum	Nam. (Urspr.)					