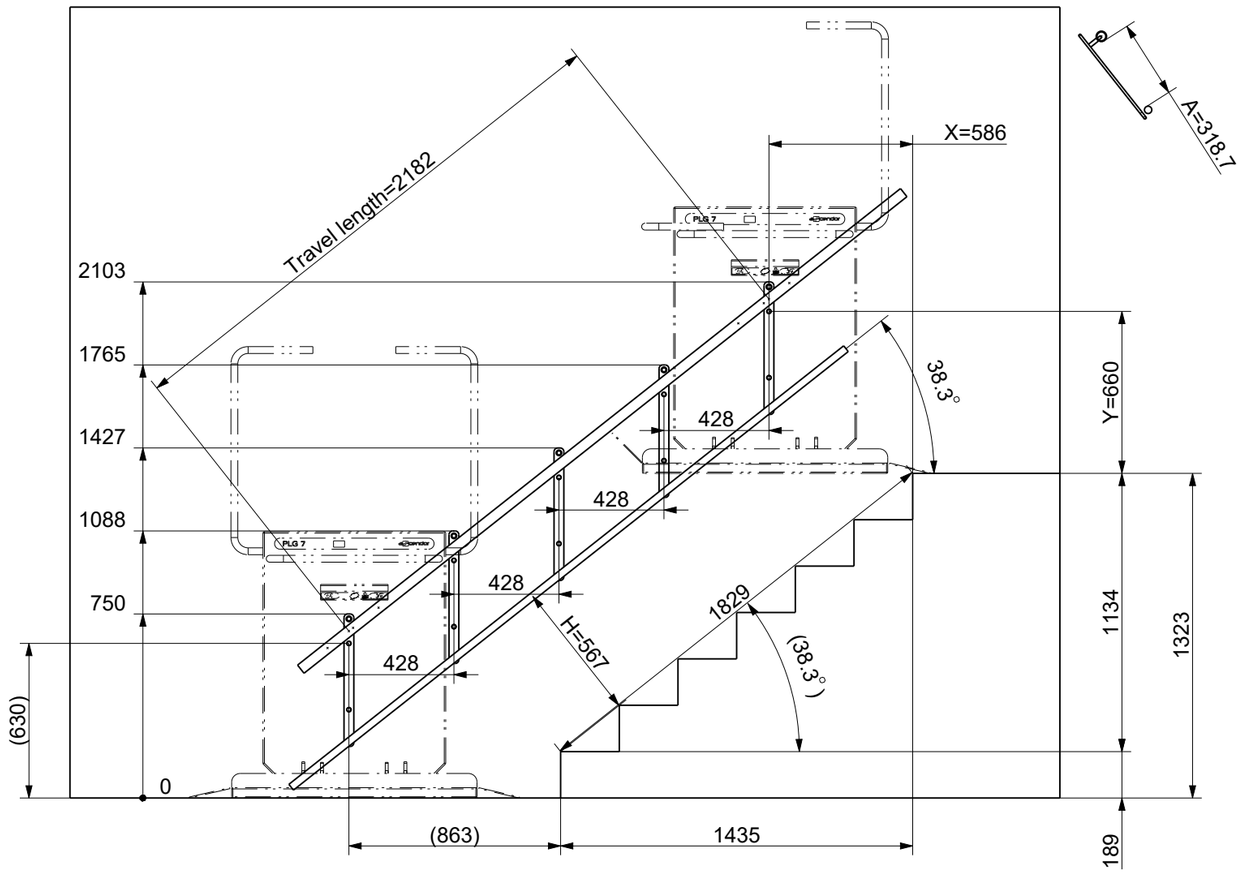

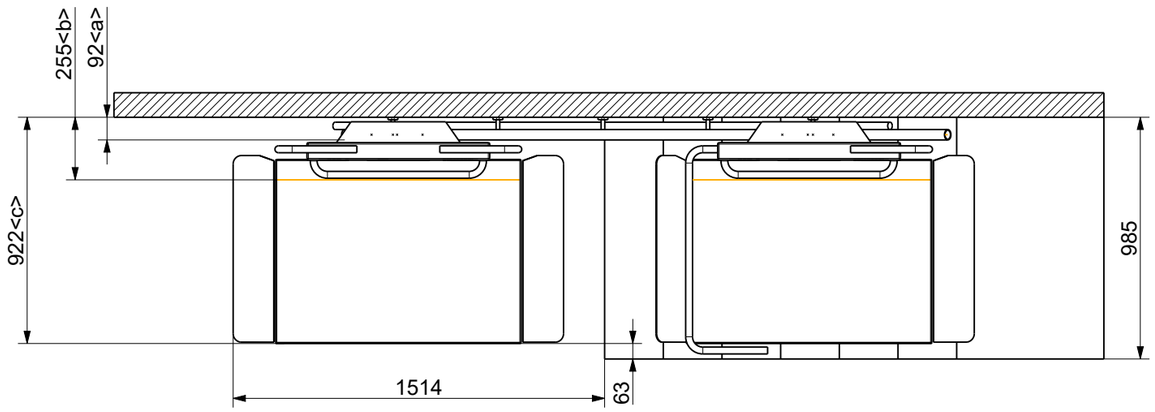

Please check:

number of steps: 7
depth over all steps: 1435mm
vertical: 1134mm
height step 1: 189mm
height last step: 189mm
nose to nose: 1829mm

PLG7 Platform Lift, automatic operation
Left hand (as viewed from lower level)
Platform Size: 1000x750mm
Platform 300kg Loading capacity
Powder coated in standard RAL 9006
Mounting: wall
2x Wall mounted operating unit incl. keyswitch
Inside installation
Box for battery charger for wall installation

Electrical power supply:
230V supply line, cable 3x1,5mm²
near the lower or upper step edge

<a> ... required space rail
<b> ... required space Platform closed
<c> ... required space Platform open

www.directlifts.com.au 1300 240 298 info@directlifts.com.au

Zuschnitt Abdeckung:
Winkel=38.317°
X=497mm // Y=106mm
X=308mm // X+H=643mm

Dateiname des Zeichnungsobjektes: PLG7-NOOSAVILLE					Dateityp: ASSEM	Dateiname der Zeichnung: PLG7-NOOSAVILLE
				Allgemeintol. DIN ISO 2768-m-S	Kanten DIN ISO 13715	Maßstab 1:25 / Gew.:154.126kg
						Halbzeug: PLG7-08-0xxxx
					Datum / Name	Benennung: Noosaville Direct Lifts
				Bear.	21.04.2020 Bindeus	
				Gepr.		
				Norm		
						Zeichnungsnummer: / Blatt1 / 2 Bl.
Zust.	Änderung	Datum	Nam.	(Urspr.)		(Ers.f.:) (Ers.d.:)